


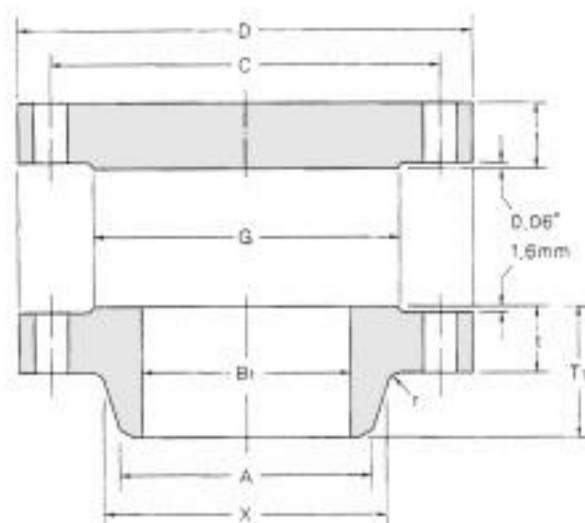

CLASS 150 FLANGES

ASME B16.47 SER.A(MSS SP 44)

Unit:mm


Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. at Base of Hub	Thickness	BORE		Length Thru Hub
					Wall Thickness		
					9.5mm	12.7mm	
					B1		
D	G	X	t			T1	
12	483	381.0	385.3	31.8	304.8	298.5	114.3
14	533	412.8	400.1	35.1	336.6	330.2	127.0
16	597	469.9	457.2	38.6	387.4	381.0	127.0
18	635	533.4	505.0	39.6	438.2	431.8	139.7
20	699	584.2	558.8	42.9	489.0	482.6	144.5
22	749	641.4	609.6	46.0	539.8	533.4	149.4
24	813	692.2	663.4	47.8	590.6	584.2	152.4
26	870	749.3	676.1	68.3	641.4	635.0	120.7
28	927	800.1	726.9	71.4	692.2	685.8	125.5
30	984	857.3	781.1	74.7	743.0	736.6	136.7
32	1060	914.4	831.9	80.8	793.8	787.4	144.5
34	1111	965.2	882.7	82.6	844.6	838.2	149.4
36	1168	1022.4	933.5	90.4	895.4	889.0	157.0
38	1238	1073.2	990.6	87.4	946.2	939.8	157.2
40	1289	1124.0	1041.4	90.4	997.0	990.6	163.6
42	1346	1193.8	1092.2	96.8	1047.8	1041.4	171.5
44	1403	1244.6	1143.0	101.6	1098.6	1092.2	177.8
46	1454	1295.4	1196.8	103.1	1149.4	1143.0	185.7
48	1511	1358.9	1247.6	108.0	1200.2	1193.8	192.0
50	1568	1409.7	1301.8	111.3	1251.0	1244.6	203.2
52	1626	1460.5	1352.6	115.8	1301.8	1295.4	209.6
54	1683	1511.3	1403.4	120.7	1352.6	1346.2	215.9
56	1746	1574.8	1457.5	124.0	1403.4	1397.0	228.6
58	1803	1625.6	1508.3	128.5	1454.2	1447.8	235.0
60	1854	1676.4	1559.1	131.8	1505.0	1498.6	239.8

Notes

(1) For the "Bore" (B1) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 83

(2) Class 150 flanges will be furnished with 0.06" (1.6mm) raised face, which is included in "Thickness" (t) and "Length thru Hub" (T1).

(3) Dimensional tolerance are in accordance with ANSI B16.5.

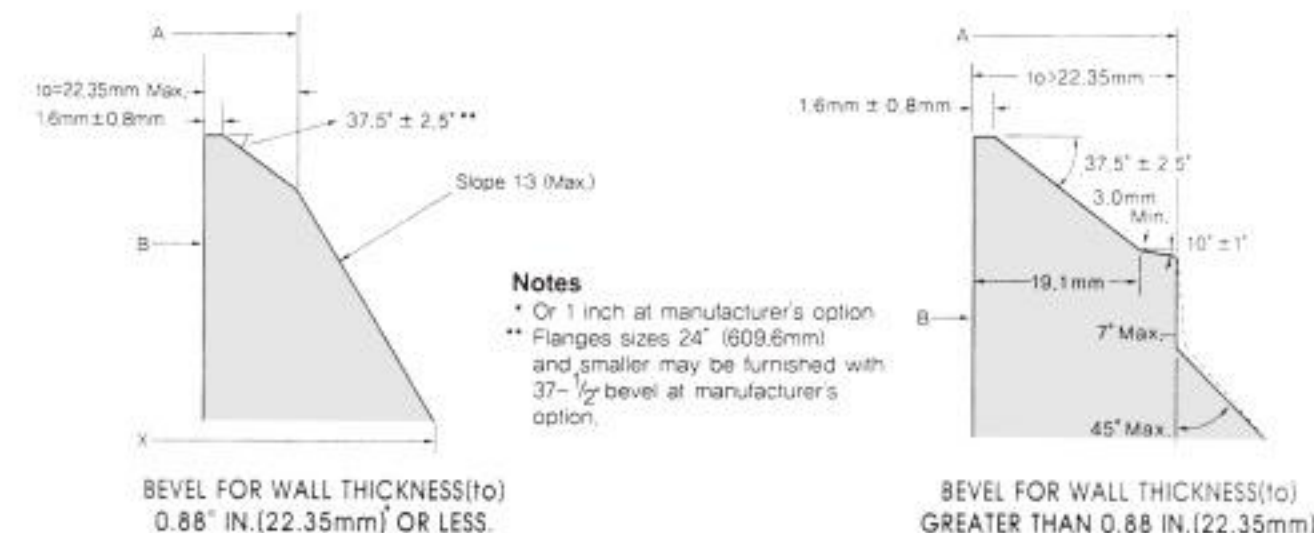


WELDING-ENDS FOR WELDING-NECK FLANGES

Unit:mm

Nominal Pipe Size	Diam. of Hub Bevel	Radius of Fillet	DRILLING			Approximate Weight(kg)	
			Bolt Circle Diam	Number of Holes	Diam of Holes	Weld-neck	Blind
	A	r	C				
12	304.8	9.7	431.8	12	25.4	38.98	43.70
14	355.6	9.7	476.3	12	28.4	51.71	59.42
16	406.4	9.7	539.8	16	28.4	64.41	77.11
18	457.2	9.7	577.9	16	31.8	74.84	94.80
20	508.0	9.7	635.0	20	31.8	89.36	123.38
22	558.8	9.7	692.2	20	35.1	112.00	-
24	609.6	9.7	749.3	20	35.1	119.66	188.24
26	660.4	9.7	806.5	24	35.1	136.10	318.40
28	711.2	11.2	863.6	28	35.1	156.50	377.80
30	762.0	11.2	914.4	28	35.1	181.40	445.40
32	812.8	11.2	977.9	28	41.1	229.10	561.10
34	863.6	12.7	1028.7	32	41.1	244.90	627.80
36	914.4	12.7	1085.9	32	41.1	290.30	760.20
38	965.2	12.7	1149.4	32	41.1	326.60	825.10
40	1016.0	12.7	1200.2	36	41.1	351.50	925.30
42	1066.8	12.7	1257.3	36	41.1	403.70	1080.00
44	1117.6	12.7	1314.5	40	41.1	449.10	1232.40
46	1168.4	12.7	1365.3	40	41.1	480.80	1343.10
48	1219.2	12.7	1422.4	44	41.1	537.50	1518.70
50	1270.0	12.7	1479.6	44	47.8	576.10	1685.60
52	1320.8	12.7	1536.7	44	47.8	639.60	1885.20
54	1371.6	12.7	1593.9	44	47.8	719.00	2104.30
56	1422.4	12.7	1651.0	48	47.8	798.30	2327.90
58	1473.2	12.7	1708.2	48	47.8	868.60	2574.20
60	1524.0	12.7	1759.0	52	47.8	927.60	2791.50

(4) Maximum Pressure Rating for raised face flanges is 285 psi (19.5BARS) at atmospheric temperature.

(5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges except 22" (558.8mm) are in accordance with ANSI B 16.5.

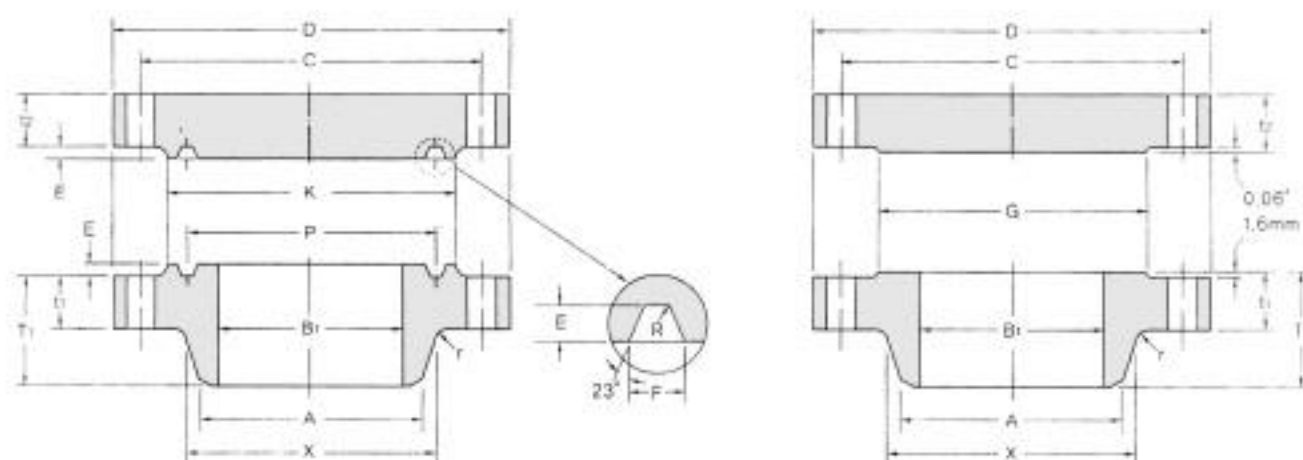

CLASS 300 FLANGES

ASME B16.47 SER.A(MSS SP 44)

Unit:mm


Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. at Base of Hub	Thickness		BORE		Length Thru Hub	Diam. of Hub at Bevel	Radius of Fillet
						Wall Thickness				
						9.5mm	12.7mm			
				D	G	X	t1	t2	B1	
12	521	381.0	374.7	50.8	50.8	304.8	298.5	130.0	304.8	9.7
14	584	412.8	425.5	53.8	53.8	336.6	330.2	142.7	355.6	9.7
16	648	469.9	482.6	57.2	57.2	387.4	381.0	146.1	406.4	9.7
18	711	533.4	533.4	60.5	60.5	468.2	431.8	158.8	457.2	9.7
20	775	584.2	587.2	63.5	63.5	489.0	482.6	162.1	508.0	9.7
22	838	641.4	641.4	66.5	66.5	539.8	533.4	165.1	558.8	9.7
24	914	692.2	701.5	69.9	69.9	590.6	584.2	168.1	609.6	9.7
26	972	749.3	720.9	79.2	84.1	641.4	635.0	184.2	660.4	9.7
28	1035	800.1	774.7	85.9	90.4	692.2	685.8	196.9	711.2	11.2
30	1092	857.3	827.0	91.9	95.3	743.0	736.6	209.6	762.0	11.2
32	1149	914.4	881.1	98.6	100.1	793.8	787.4	222.3	812.8	11.2
34	1207	965.2	936.8	101.6	104.6	844.6	838.2	231.6	863.6	12.7
36	1270	1022.4	990.6	104.6	111.3	895.4	889.0	241.3	914.4	12.7
38	1168	1028.7	993.6	108.0	108.0	946.2	939.8	180.8	965.2	12.7
40	1238	1085.9	1047.8	114.3	114.3	997.0	990.6	193.5	1016.0	12.7
42	1289	1136.7	1098.6	119.1	119.1	1047.8	1041.4	200.2	1066.8	12.7
44	1353	1193.8	1149.4	124.0	124.0	1098.6	1092.2	206.2	1117.6	12.7
46	1416	1244.6	1203.5	128.5	128.5	1149.4	1143.0	215.9	1168.4	12.7
48	1467	1301.8	1254.3	133.4	133.4	1200.2	1193.8	223.8	1219.2	12.7
50	1530	1358.9	1305.1	139.7	139.7	1251.0	1244.6	231.6	1270.0	12.7
52	1581	1409.7	1355.9	144.5	144.5	1301.8	1295.4	238.3	1320.8	12.7
54	1657	1466.9	1409.7	152.4	152.4	1352.6	1346.2	252.5	1371.6	12.7
56	1708	1517.7	1463.5	153.9	153.9	1403.4	1397.0	260.4	1422.4	12.7
58	1759	1574.8	1514.3	158.8	158.8	1454.2	1447.8	266.7	1473.2	12.7
60	1810	1625.6	1565.1	163.6	163.6	1505.0	1498.6	273.1	1524.0	12.7

Notes

(1) For the "Bore" (B1) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 83.

(2) Class 300 flanges will be furnished with 0.06" (1.6mm) raised face, which is included in "Thickness" (t) and "Length thru Hub" (T1).

(3) Dimensional tolerance are in accordance with ASME B 16.5.

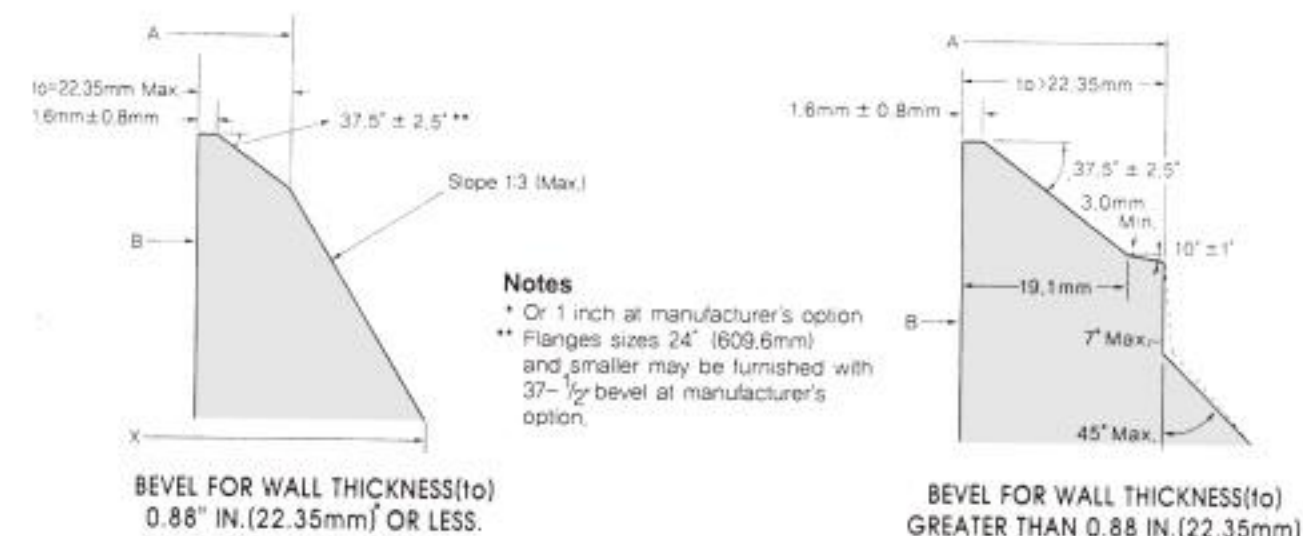

WELDING-ENDS FOR WELDING-NECK FLANGES


Unit:mm

Nominal Pipe Size	DRILLING			Pitch Dima	GROOVE DIMENSIONS			Diam. of Raised Face	Ring and Groove Number	Approximate Weight(kg)	
	Bolt Circle Diam	Number of Holes	Diam of Holes		Width	Depth	Radius			Weld- neck	Blind
12	450.9	16	31.8	381.0	11.9	7.9	0.8	412.8	R57	64.41	78.90
14	514.4	20	31.8	419.1	11.9	7.9	0.8	457.2	R61	88.30	107.05
16	571.5	20	35.1	469.9	11.9	7.9	0.8	508.0	R65	112.94	139.25
18	628.7	24	35.1	533.4	11.9	7.9	0.8	574.5	R69	138.34	176.90
20	685.8	24	35.1	584.2	13.5	9.5	1.5	635.0	R73	167.37	223.17
22	743.0	24	41.1	635.0	15.1	11.1	1.5	685.8	R81	213.00	-
24	812.8	24	41.1	692.2	16.7	11.1	1.5	749.3	R77	235.41	342.00
26	876.3	28	44.5	749.3	19.8	12.7	1.5	809.8	R93	274.40	489.00
28	939.8	28	44.5	800.1	19.8	12.7	1.5	860.6	R94	337.90	596.50
30	997.0	28	47.8	857.3	19.8	12.7	1.5	917.4	R95	394.60	699.90
32	1054.1	28	50.8	914.4	23.0	14.3	1.5	984.3	R96	455.90	814.20
34	1104.9	28	50.8	965.2	23.0	14.3	1.5	1035.1	R97	519.40	938.00
36	1168.4	32	53.8	1022.4	23.0	14.3	1.5	1092.2	R98	578.30	1105.00
38	1092.2	32	41.1							315.30	907.70
40	1155.7	32	44.5							381.00	1079.60
42	1206.5	32	44.5							430.90	1219.30
44	1263.7	32	47.8							478.50	1396.60
46	1320.8	28	50.8							560.20	1587.10
48	1371.6	32	50.8							626.00	1767.20
50	1428.8	32	53.8							694.00	2014.90
52	1479.6	32	53.8							753.00	2225.40
54	1549.4	28	60.5							929.90	2578.30
56	1600.2	28	60.5							977.50	2766.10
58	1651.0	32	60.5							1029.70	3025.10
60	1701.8	32	60.5							1120.40	3299.50

(4) Maximum Pressure Rating for raised face flanges is 740 psi (51BARS) at atmospheric temperature.

(5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges except 22" (558.8mm) are in accordance with ASME B 16.5.

(6) For sizes 26" (660.4mm) and larger, Diameter of Hub at Bevel (A) are in accordance with ASME Boiler and pressure vessel code.

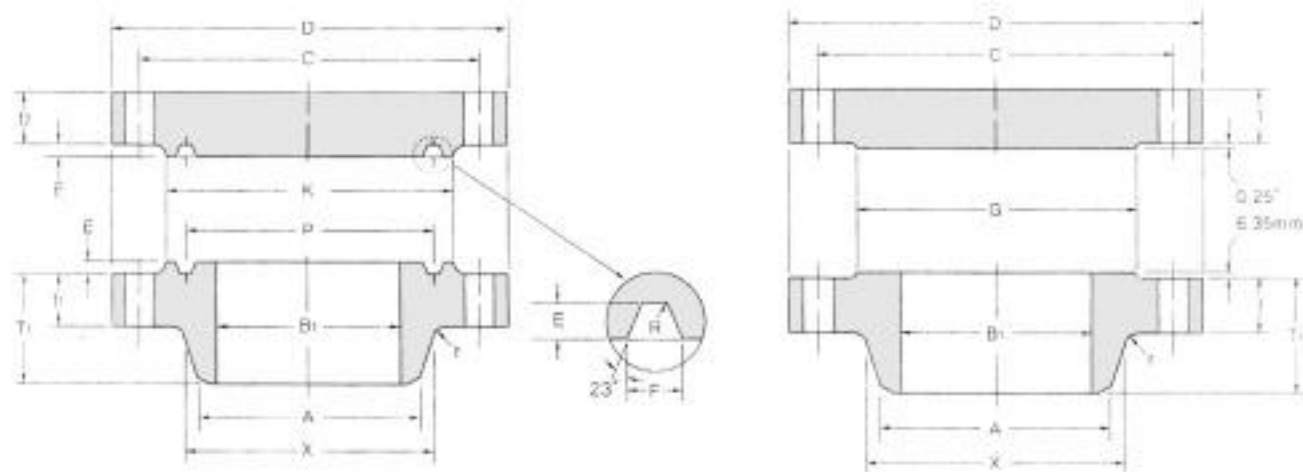

CLASS 400 FLANGES

ASME B16.47 SER.A (MSS SP 44)

Unit:mm


Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. at Base of Hub	Thickness		BORE		Length Thru Hub	Diam. of Hub at Bevel	Radius of Fillet
						Wall Thickness				
						9.5mm	12.7mm			
				D	G	X	t1	t2	B1	
12	521	381.0	374.7	57.2	57.2	304.8	298.5	136.7	323.9	11.2
14	584	412.8	425.5	60.5	60.5	336.6	330.2	149.4	355.6	11.2
16	648	469.9	482.6	63.5	63.5	387.4	381.0	152.4	406.4	11.2
18	711	533.4	533.4	66.5	66.5	438.2	431.8	165.1	457.2	11.2
20	775	584.2	587.2	69.9	69.9	489.0	482.6	168.1	508.0	11.2
22	838	641.4	641.4	73.2	73.2	539.8	533.4	171.5	558.8	11.2
24	914	692.2	701.5	76.2	76.2	590.6	584.2	174.8	609.6	11.2
26	972	749.3	726.9	88.9	98.6	641.4	635.0	193.5	660.4	11.2
28	1035	800.1	782.6	95.3	104.6	692.2	685.8	206.2	711.2	12.7
30	1092	857.3	836.7	101.6	111.3	743.0	736.6	218.9	762.0	12.7
32	1149	914.4	889.0	108.0	115.8	793.8	787.4	231.6	812.8	12.7
34	1207	965.2	944.6	111.3	122.2	844.6	838.2	241.3	863.6	14.2
36	1270	1022.4	1000.3	114.3	128.5	895.4	889.0	251.0	914.4	14.2
38	1207	1035.1	1003.3	124.0	124.0	946.2	939.8	206.2	965.2	14.2
40	1270	1092.2	1054.1	130.0	130.0	997.0	990.6	215.9	1016.0	14.2
42	1321	1143.0	1107.9	133.4	133.4	1047.8	1041.4	223.8	1066.8	14.2
44	1384	1200.2	1158.7	139.7	139.7	1098.6	1092.2	233.4	1117.6	14.2
46	1441	1257.3	1212.9	146.1	146.1	1149.4	1143.0	244.3	1168.4	14.2
48	1511	1308.1	1267.0	152.4	152.4	1200.2	1193.8	257.0	1219.2	14.2
50	1588	1361.9	1320.8	157.2	158.8	1251.0	1244.6	268.2	1270.0	14.2
52	1619	1412.7	1371.6	162.1	163.6	1301.8	1295.4	276.4	1320.8	14.2
54	1702	1470.2	1425.4	169.9	171.5	1352.6	1346.2	289.1	1371.6	14.2
56	1753	1527.0	1479.6	174.8	176.3	1403.4	1397.0	298.5	1422.4	14.2
58	1803	1577.8	1530.4	177.8	180.8	1454.2	1447.8	306.3	1473.2	14.2
60	1886	1635.3	1584.5	185.7	189.0	1505.0	1498.6	319.0	1524.0	14.2

Notes

(1) For the "Bore" (B1) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 83.

(2) Class 400 flanges will be furnished with 0.25" (6.4mm) raised face, which is included in "Thickness" (t) and "Length thru Hub" (T1).

(3) Dimensional tolerance are in accordance with ASME B 16.5.

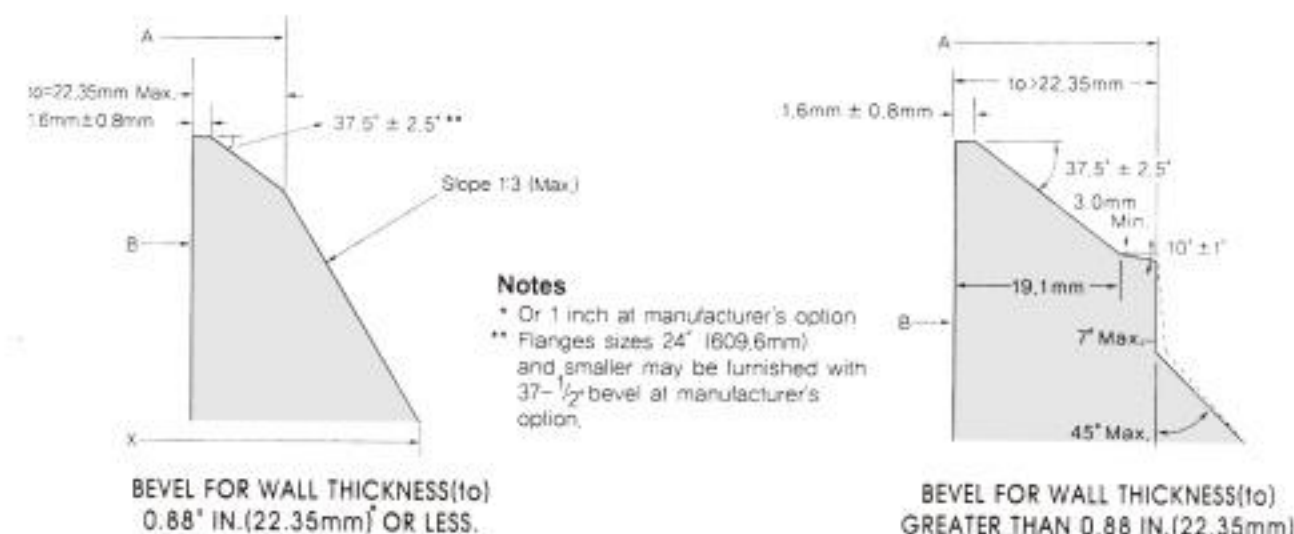

WELDING-ENDS FOR WELDING-NECK FLANGES


Unit:mm

Nominal Pipe Size	DRILLING			Pitch Dima	GROOVE DIMENSIONS			Diam. of Raised Face	Ring and Groove Number	Approximate Weight(kg)	
	Bolt Circle Diam	Number of Holes	Diam of Holes		Width	Depth	Radius			Weld- neck	Blind
12	450.9	16	35.1	381.0	11.9	7.9	0.8	412.8	R57	72.57	98.00
14	514.4	20	35.1	419.1	11.9	7.9	0.8	457.2	R61	105.69	131.66
16	571.5	20	38.1	469.9	11.9	7.9	0.8	508.0	R65	133.30	167.00
18	628.7	24	38.1	533.4	11.9	7.9	0.8	574.5	R69	158.90	206.57
20	685.8	24	41.1	584.2	13.5	9.5	1.5	635.0	R73	193.00	261.00
22	743.0	24	44.5	635.0	15.1	11.1	1.5	685.8	R81	235.00	-
24	812.8	24	47.8	692.2	16.7	11.1	1.5	749.3	R77	281.48	395.00
26	876.3	28	47.8	749.3	19.8	12.7	1.5	809.8	R93	294.80	572.90
28	939.8	28	50.8	800.1	19.8	12.7	1.5	860.6	R94	356.10	690.40
30	997.0	28	53.8	857.3	19.8	12.7	1.5	917.4	R95	410.50	817.40
32	1054.1	28	53.8	914.4	23.0	14.3	1.5	984.3	R96	483.10	942.10
34	1104.9	28	53.8	965.2	23.0	14.3	1.5	1035.1	R97	544.30	1095.40
36	1168.4	32	53.8	1022.4	23.0	14.3	1.5	1092.2	R98	607.80	1276.90
38	1117.6	32	47.8							424.10	1111.30
40	1174.8	32	50.8							494.40	1291.90
42	1225.6	32	50.8							539.80	1432.90
44	1282.7	32	53.8							623.70	1648.80
46	1339.9	36	53.8							691.70	1868.80
48	1403.4	28	60.5							811.90	2143.70
50	1460.5	32	60.5							884.50	2405.40
52	1511.3	32	60.5							963.90	2641.30
54	1581.2	28	66.5							1163.50	3058.20
56	1632.0	32	66.5							1229.30	3334.90
58	1682.8	32	66.5							1465.10	3622.40
60	1752.6	32	73.2							1732.80	4139.60

(4) Maximum Pressure Rating for raised face flanges is 985 psi (68BARS) at atmospheric temperature.

(5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges except 22" (558.8mm) are in accordance with ASME B 16.5.

(6) For sizes 26" (660.4mm) and larger, Diameter of Hub at Bevel (A) are in accordance with ASME Boiler and pressure vessel code.

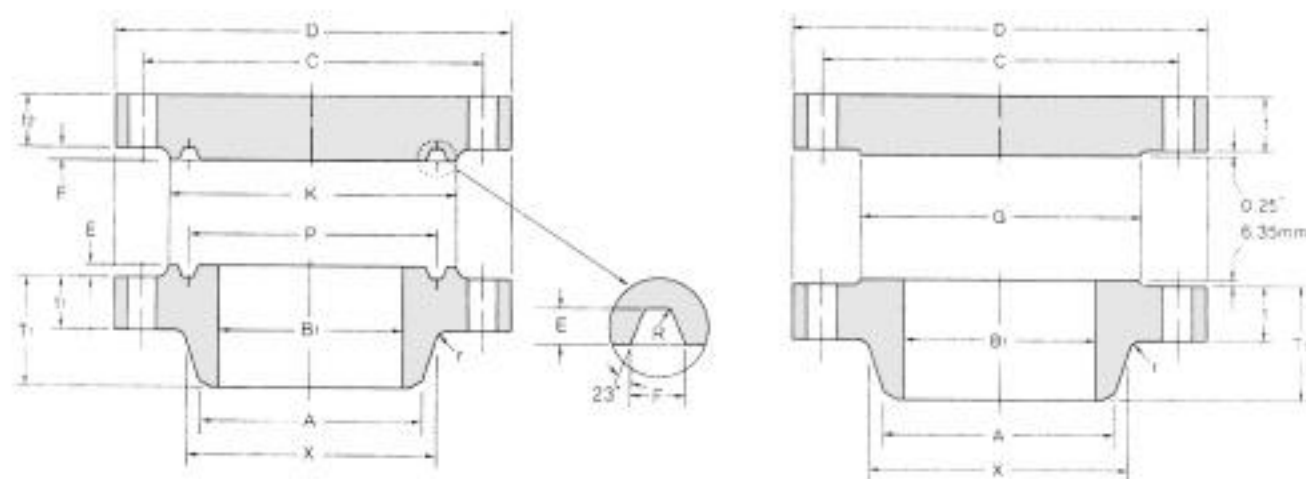

CLASS 600 FLANGES


ASME B16.47 SER.A(MSS SP 44)

Unit:mm

Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. at Base of Hub	Thickness		BORE		Length Thru Hub	Diam. of Hub at Bevel	Radius of Fillet
						Wall Thickness				
						9.5mm	12.7mm			
				D	G	X	t1	t2	B1	
12	559	381.0	400.1	66.5	66.5	304.8	298.5	155.4	323.9	11.2
14	603	412.8	431.8	69.9	69.9	336.6	330.2	165.1	355.6	11.2
16	666	469.9	495.3	76.2	76.2	387.4	381.0	177.8	406.4	11.2
18	743	533.4	546.1	82.6	82.6	438.2	431.8	184.2	457.2	11.2
20	813	584.2	609.6	88.9	88.9	489.0	482.6	190.5	508.0	11.2
22	870	641.2	666.8	95.3	95.3	539.8	533.4	196.9	558.8	11.2
24	940	692.2	717.6	101.6	101.6	590.6	584.2	203.2	609.6	11.2
26	1016	749.3	747.8	108.0	125.5	641.4	635.0	222.3	660.4	12.7
28	1073	800.1	803.1	111.3	131.8	692.2	685.8	235.0	711.2	12.7
30	1130	857.3	862.1	114.3	139.7	743.0	736.6	247.7	762.0	12.7
32	1194	914.4	917.4	117.3	147.6	793.8	787.4	260.4	812.8	12.7
34	1245	965.2	973.1	120.7	153.9	844.6	838.2	269.7	863.6	14.2
36	1314	1022.4	1031.7	124.0	162.1	895.4	889.0	282.4	914.4	14.2
38	1270	1054.1	1022.4	152.4	155.4	946.2	939.8	254.0	965.2	14.2
40	1321	1111.3	1073.2	158.8	162.1	997.0	990.6	263.7	1016.0	14.2
42	1403	1168.4	1127.3	168.1	171.5	1047.8	1041.4	279.4	1066.8	14.2
44	1454	1225.6	1181.1	173.0	177.8	1098.6	1092.2	289.1	1117.6	14.2
46	1511	1276.4	1234.9	179.3	185.7	1149.4	1143.0	300.0	1168.4	14.2
48	1594	1333.5	1289.1	189.0	195.3	1200.2	1193.8	316.0	1219.2	14.2
50	1670	1384.3	1343.2	196.9	203.2	1251.0	1244.6	328.7	1270.0	14.2
52	1721	1435.1	1394.0	203.2	209.6	1301.8	1295.4	336.6	1320.8	14.2
54	1778	1492.3	1447.8	209.6	217.4	1352.6	1346.2	349.3	1371.6	14.2
56	1854	1543.1	1501.6	217.4	225.6	1403.4	1397.0	362.0	1422.4	15.7
58	1905	1600.2	1552.4	222.3	231.6	1454.2	1447.8	369.8	1473.2	15.7
60	1994	1657.4	1609.9	233.4	242.8	1505.0	1498.6	388.9	1524.0	17.5

Notes

- (1) For the 'Bore' (B1) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 50, 51.
 (2) Class 600 flanges will be furnished with 0.25" (6.35mm) raised face, which is included in 'Thickness' (t) and 'Length thru Hub' (T1).
 (3) Dimensional tolerance are in accordance with ASME B 16.5.

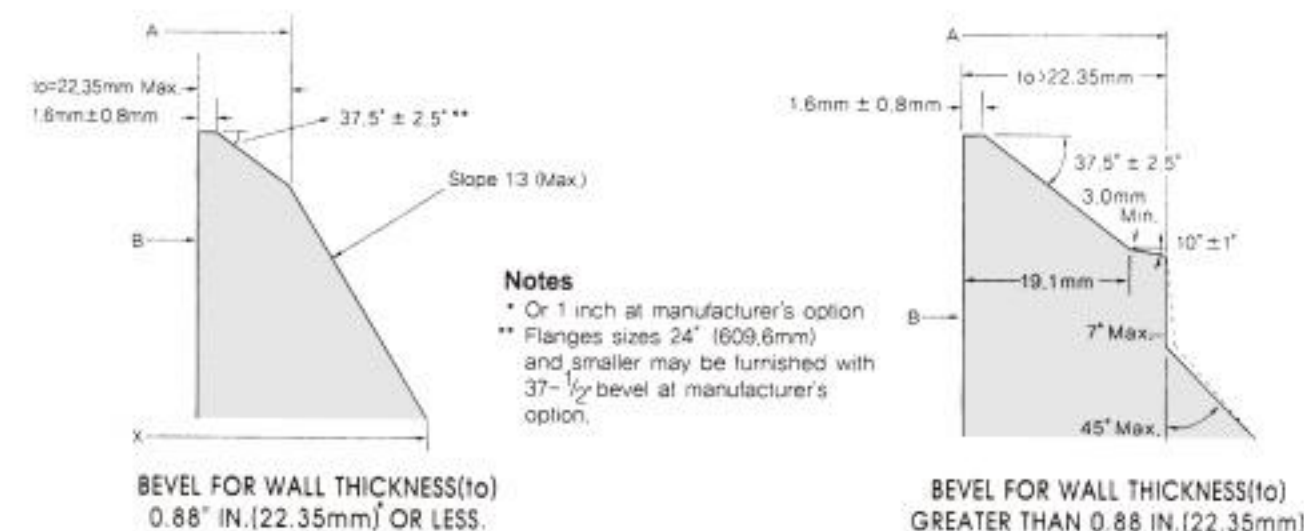

WELDING-ENDS FOR WELDING-NECK FLANGES


Unit:mm

Nominal Pipe Size	DRILLING			Pitch Dima	GROOVE DIMENSIONS			Diam. of Raised Face	Ring and Groove Number	Approximate Weight(kg)	
	Bolt Circle Diam	Number of Holes	Diam of Holes		Width	Depth	Radius			Weld- neck	Blind
12	489.0	20	35.1	381.0	11.9	7.9	0.8	412.8	R57	102.51	132.00
14	527.1	20	38.1	419.1	11.9	7.9	0.8	457.2	R61	121.56	158.00
16	603.3	20	41.1	469.9	11.9	7.9	0.8	508.0	R65	177.06	224.73
18	654.1	20	44.5	533.4	11.9	7.9	0.8	574.5	R69	215.65	285.00
20	723.9	24	44.5	584.2	13.5	9.5	1.5	635.0	R73	267.86	365.00
22	777.7	24	47.8	635.0	15.1	11.1	1.5	685.8	R81	330.00	—
24	838.2	24	50.8	692.2	16.7	11.1	1.5	749.3	R77	372.00	533.45
26	914.4	28	50.8	749.3	19.8	12.7	1.5	809.8	R93	426.40	797.90
28	965.2	28	53.8	800.1	19.8	12.7	1.5	860.6	R94	480.80	934.90
30	1022.4	28	53.8	857.3	19.8	12.7	1.5	917.4	R95	548.90	1099.10
32	1079.5	28	60.5	914.4	23.0	14.3	1.5	984.3	R96	623.70	1295.50
34	1130.3	28	60.5	965.2	23.0	14.3	1.5	1035.1	R97	698.50	1468.30
36	1193.8	28	66.5	1022.4	23.0	14.3	1.5	1092.2	R98	773.40	1724.80
38	1162.1	28	60.5							668.80	1544.10
40	1212.9	32	60.5							739.40	1740.90
42	1282.7	28	66.5							920.80	2079.80
44	1333.5	32	66.5							979.80	2315.60
46	1390.7	32	66.5							1093.20	2611.80
48	1460.5	32	73.2							1295.00	3055.90
50	1524.0	28	79.2							1510.50	3490.50
52	1574.8	32	79.2							1614.80	3822.00
54	1632.0	32	79.2							1778.10	4233.40
56	1695.5	32	85.9							1941.40	4776.00
58	1746.3	32	85.9							2104.70	5177.40
60	1822.5	28	91.9							2268.00	5945.80

(4) Maximum Pressure Rating for raised face flanges is 1480 psi (102.1 BARS) at atmospheric temperature.

(5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges except 22" (558.8mm) are in accordance with ASME B 16.5.

(6) For sizes 26" (660.4mm) and larger. Diameter of Hub at Bevel (A) are in accordance with ASME Boiler and pressure vessel code.

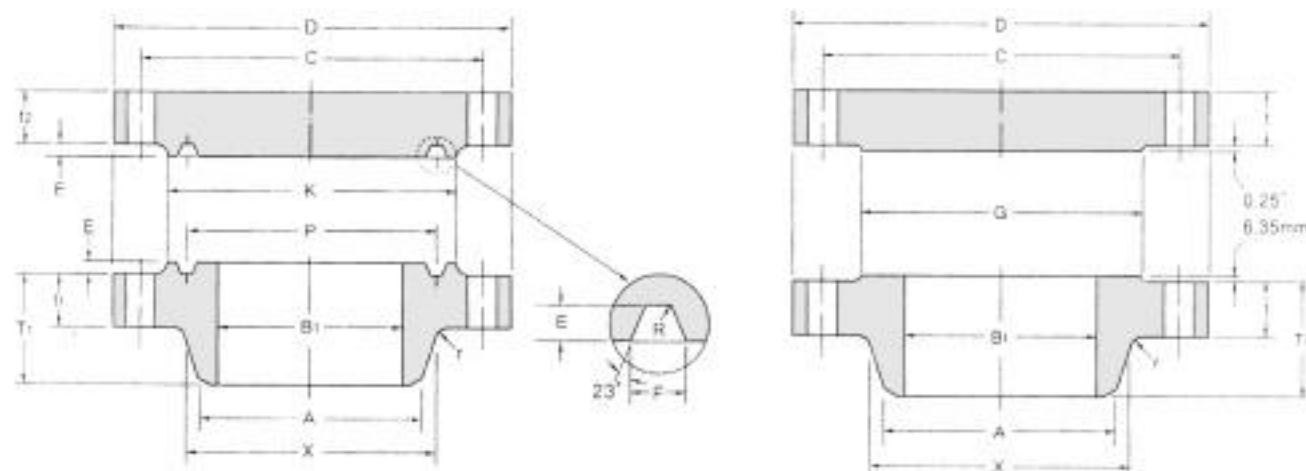

CLASS 900 FLANGES

ASME B16.47 SER.A(MSS SP 44)

Unit:mm


Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. at Base of Hub	Thickness		BORE		Length Thru Hub	Diam. of Hub at Bevel	Radius of Fillet
						Wall Thickness				
				Welding Neck	Blind	9.5mm	12.7mm			
D	G	X	t1	t2	B1		T1	A	r	
12	610	381.0	419.1	79.2	79.2	304.8	298.5	200.2	323.9	11.2
14	641	412.8	450.9	85.9	85.9	338.6	330.2	212.9	355.6	11.2
16	705	469.9	508.0	88.9	88.9	387.4	381.0	215.9	406.4	11.2
18	787	533.4	565.2	101.6	101.6	438.2	431.8	228.6	457.2	11.2
20	857	584.2	622.3	108.0	108.0	489.0	482.6	247.7	508.0	11.2
24	1041	692.2	749.3	139.7	139.7	590.6	584.2	292.1	609.6	11.2
26	1086	749.3	774.7	139.7	160.3	641.4	635.0	285.8	660.4	11.2
28	1168	800.1	831.9	142.7	171.5	692.2	685.8	298.5	711.2	12.7
30	1232	857.3	889.0	149.4	182.4	743.0	736.6	311.2	762.0	12.7
32	1314	914.4	946.2	158.8	193.5	793.8	787.4	330.2	812.8	12.7
34	1397	965.2	1006.3	165.1	204.7	844.6	838.2	349.3	863.6	14.2
36	1461	1022.4	1063.8	171.5	214.4	895.4	889.0	362.0	914.4	14.2
38	1461	1098.6	1073.2	190.5	215.9	946.2	939.8	352.6	965.2	19.1
40	1511	1162.1	1127.3	196.9	223.8	997.0	990.6	363.5	1016.0	20.6
42	1562	1212.9	1176.3	206.2	231.6	1047.8	1041.4	371.3	1066.8	20.6
44	1648	1270.0	1234.9	214.4	242.8	1098.6	1092.2	390.7	1117.6	22.4
46	1734	1333.5	1292.4	225.6	255.5	1149.4	1143.0	411.0	1168.4	22.4
48	1784	1384.3	1343.2	233.4	263.7	1200.2	1193.8	419.1	1219.2	23.9

Notes

(1) For the 'Bore' (B1) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 83.

(2) Class 900 flanges will be furnished with 0.25" (6.35mm) raised face, which is included in 'Thickness' (T1) and 'Length thru Hub' (T1).

(3) Dimensional tolerance are in accordance with ASME B 16.5.

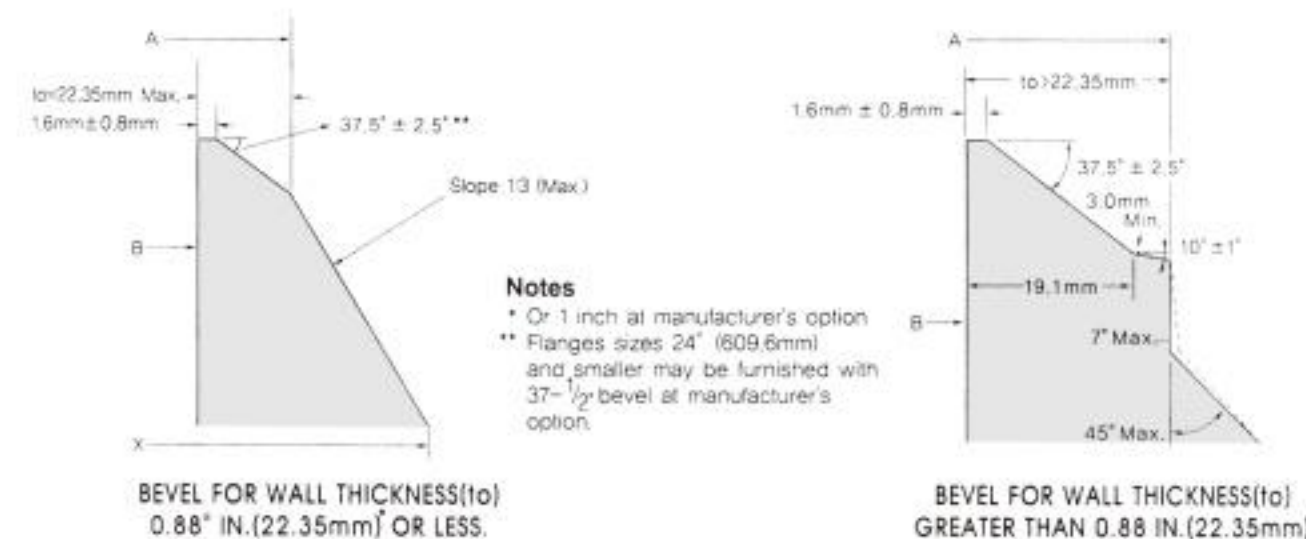

WELDING-ENDS FOR WELDING-NECK FLANGES


Unit:mm

Nominal Pipe Size	DRILLING			Pitch Dima	GROOVE DIMENSIONS			Diam. of Raised Face	Ring and Groove Number	Approximate Weight(kg)		
	Bolt Circle Diam	Number of Holes	Diam of Holes		Width	Depth	Radius			Weld- neck	Blind	
												C
12	533.4	20	38.1	381.0	11.9	7.9	0.8	419.1	R57	157.00	187.00	
14	558.8	20	41.1	419.1	16.7	11.1	1.5	466.9	R62	181.00	224.07	
16	616.0	20	44.5	469.9	16.7	11.1	1.5	523.7	R66	224.73	272.40	
18	685.8	20	50.8	533.4	19.8	12.7	1.5	593.9	R70	308.72	385.90	
20	749.3	20	53.8	584.2	19.8	12.7	1.5	647.7	R74	376.82	488.00	
24	901.7	20	66.5	692.2	27.0	15.9	2.3	771.7	R78	685.00	905.00	
26	952.5	20	73.2	749.3	30.2	17.5	2.3	831.9	R100	691.70	1163.90	
28	1022.4	20	79.2	800.1	33.3	17.5	2.3	889.0	R101	821.00	1441.50	
30	1085.9	20	79.2	857.3	33.3	17.5	2.3	946.2	R102	961.60	1704.60	
32	1155.7	20	85.9	914.4	33.3	17.5	2.3	1003.3	R103	1154.40	2059.80	
34	1225.6	20	91.9	965.2	36.5	20.6	2.3	1066.8	R104	1347.20	2460.80	
36	1289.1	20	91.9	1022.4	36.5	20.6	2.3	1124.0	R105	1540.00	2816.40	
38	1289.1	20	91.9							1535.40		2836.40
40	1339.9	24	91.9							1642.00		3148.00
42	1390.7	24	91.9							1796.30		3481.40
44	1463.5	24	98.6							1950.50		4061.50
46	1536.7	24	104.6							2104.70		4729.20
48	1587.5	24	104.6							2258.90		5170.10

(4) Maximum Pressure Rating for raised face flanges is 2220 psi (153.1 BARS) at atmospheric temperature.

(5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges are in accordance with ASME B 16.5.

(6) For sizes 26" (660.4mm) and larger. Diameter of Hub at Bevel (A) are in accordance with ASME Boiler and pressure vessel code.

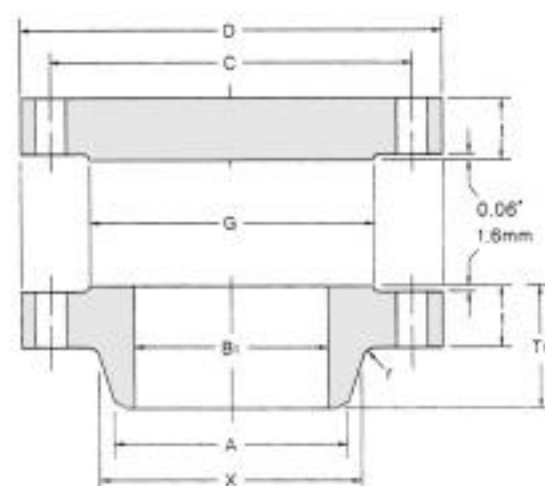BEVEL FOR WALL THICKNESS(to)
0.68" IN.(22.35mm) OR LESS.BEVEL FOR WALL THICKNESS(to)
GREATER THAN 0.68 IN.(22.35mm)

CLASS 75 FLANGES

ASME B16.47 SER.B (API 605)




Unit:mm

Nominal Pipe Size	Outside Diam.	O.D. of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding Neck		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X	A	B1			T1	t	t	r	c
26	762	704.9	676.1	661.9	647.7	641.4	635.0	58.7	33.3	33.3	7.9	723.9	36	19.1	36.3	115.7
28	813	755.7	726.9	712.7	698.5	692.2	685.8	62.0	33.3	33.3	7.9	774.7	40	19.1	38.6	131.5
30	864	806.5	777.7	763.5	749.3	743.0	736.6	65.0	33.3	33.3	7.9	825.5	44	19.1	40.8	149.7
32	914	857.3	828.5	814.3	800.1	793.8	787.4	69.9	36.6	35.1	7.9	876.3	48	19.1	47.6	176.9
34	965	908.1	879.3	865.1	850.9	844.6	838.2	73.2	38.1	35.1	7.9	927.1	52	19.1	49.9	195.0
36	1034	965.2	935.0	915.9	850.9	895.4	889.0	85.9	42.4	36.6	9.7	992.1	40	22.4	65.8	235.0
38	1084	1016.0	985.8	966.7	952.5	946.2	939.8	88.9	44.5	38.1	9.7	1042.9	40	22.4	72.6	269.9
40	1135	1066.8	1036.6	1017.5	1003.3	997.0	990.6	91.9	44.5	38.1	9.7	1093.7	44	22.4	77.1	344.7
42	1186	1117.6	1087.4	1068.3	1054.1	1047.8	1041.4	95.3	47.8	39.6	9.7	1144.5	48	22.4	83.9	406.0
44	1251	1174.8	1140.0	1119.1	1104.9	1098.6	1092.2	104.6	49.3	42.9	9.7	1203.5	36	25.4	104.3	483.1
46	1302	1225.6	1190.8	1169.9	1155.7	1149.4	1143.0	108.0	50.8	44.5	9.7	1254.3	40	25.4	111.1	537.5
48	1353	1276.4	1241.6	1220.7	1206.5	1200.2	1193.8	111.3	53.8	46.0	9.7	1305.1	44	25.4	122.5	596.5
50	1403	1327.2	1293.9	1271.5	1257.3	1251.0	1244.6	115.8	55.4	47.8	9.7	1355.9	44	25.4	131.5	682.7
52	1457	1378.0	1344.7	1322.3	1308.1	1301.8	1295.4	120.7	57.2	47.8	9.7	1409.7	48	25.4	140.6	755.2
54	1508	1428.8	1397.0	1373.1	1358.9	1352.6	1346.2	125.5	60.5	49.3	9.7	1460.5	48	25.4	154.2	834.6
56	1575	1485.9	1450.8	1423.9	1409.7	1403.4	1397.0	134.9	62.0	50.8	11.2	1521.0	40	28.4	181.4	957.1
58	1626	1536.7	1501.6	1474.7	1460.5	1454.2	1447.8	138.2	63.5	52.3	11.2	1571.8	44	28.4	195.0	1043.3
60	1676	1587.5	1552.4	1525.5	1511.3	1505.0	1498.6	144.5	66.5	55.6	11.2	1622.6	44	28.4	215.5	1134.0

Notes

(1) "Bore" (B1) of flanges shall be specified by the purchaser.

(2) Class 300 flanges will be furnished with 0.06" (1.6mm) raised face which is included in "Thickness" (t) and "Length thru Hub" (T1).

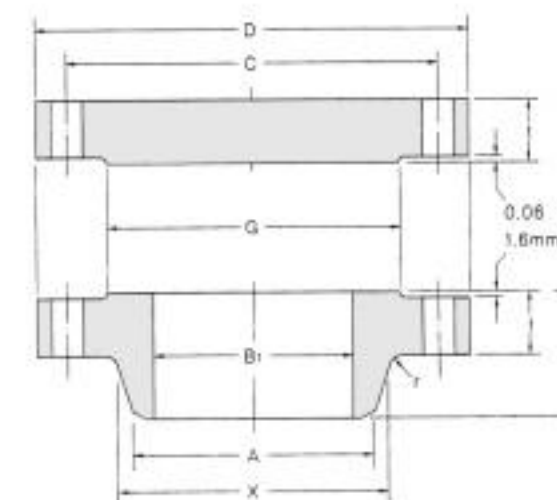BEVEL FOR WALL THICKNESS(to)
0.68" IN.(22.35mm) OR LESS.BEVEL FOR WALL THICKNESS(to)
GREATER THAN 0.68 IN.(22.35mm)

CLASS 150 FLANGES

ASME B16.47 SER.B (API 605)



Unit:mm

Nominal Pipe Size	Outside Diam.	O.D. of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X		A	B1			T1	t	t	r
26	786	711.2	684.3	661.9	647.7	641.4	635.0	88.9	44.5	41.1	9.7	744.5	36	22.4	54.4	169.2
28	837	762.0	735.1	712.7	698.5	692.2	685.8	95.3	47.8	44.5	9.7	795.3	40	22.4	63.5	205.9
30	887	812.8	787.4	763.5	749.3	743.0	736.6	100.1	50.8	44.5	9.7	846.1	44	22.4	68.0	246.3
32	941	863.6	839.7	814.3	800.1	793.8	787.4	108.0	53.8	46.0	9.7	900.2	48	22.4	77.1	293.9
34	1005	920.8	892.0	865.1	850.9	844.6	838.2	110.2	57.2	49.3	9.7	957.3	40	25.4	95.3	355.2
36	1057	971.6	944.6	915.9	901.7	895.4	889.0	117.3	58.7	52.3	9.7	1009.7	44	25.4	108.9	403.7
38	1124	1022.4	997.0	968.2	952.5	946.2	939.8	124.0	63.5	53.8	9.7	1069.8	40	28.4	131.5	494.0
40	1175	1079.5	1049.3	1019.0	1003.3	997.0	990.6	128.5	66.5	55.6	9.7	1120.6	44	28.4	140.6	565.6
42	1226	1130.3	1101.9	1069.8	1054.1	1047.8	1041.4	133.4	68.3	58.7	11.2	1171.4	48	28.4	156.5	631.9
44	1276	1181.1	1152.7	1120.6	1104.9	1098.6	1092.2	136.7	71.4	60.5	11.2	1222.2	52	28.4	167.8	716.2
46	1341	1234.9	1205.0	1171.4	1155.7	1149.4	1143.0	144.5	74.7	62.0	11.2	1284.2	40	31.8	197.3	827.4
48	1392	1289.1	1257.3	1222.2	1206.5	1200.2	1193.8	149.4	77.7	65.0	11.2	1335.0	44	31.8	217.7	927.6
50	1443	1339.9	1308.1	1273.0	1257.3	1251.0	1244.6	153.9	80.8	68.3	11.2	1385.8	48	31.8	235.9	1036.0
52	1494	1390.7	1360.4	1323.8	1308.1	1301.8	1295.4	157.2	84.1	69.9	11.2	1436.6	52	31.8	249.5	1155.3
54	1549	1441.5	1412.7	1374.6	1358.9	1352.6	1346.2	162.1	87.4	71.4	11.2	1492.3	56	31.8	281.2	1291.9
56	1600	1492.3	1465.3	1425.4	1409.7	1403.4	1397.0	166.6	90.4	73.2	14.2	1543.1	60	31.8	294.8	1426.1
58	1675	1543.1	1516.1	1476.2	1460.5	1454.2	1447.8	174.8	93.5	74.7	14.2	1611.4	48	35.1	353.8	1614.8
60	1726	1600.2	1570.0	1527.0	1511.3	1505.0	1498.6	179.3	96.8	76.2	14.2	1662.2	52	35.1	385.6	1774.9

Notes

(1) "Bore" (B1) of flanges shall be specified by the purchaser.

(2) Class 300 flanges will be furnished with 0.06" (1.6mm) raised face which is included in "Thickness" (t) and "Length thru Hub" (T1).

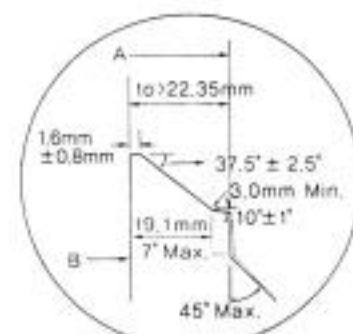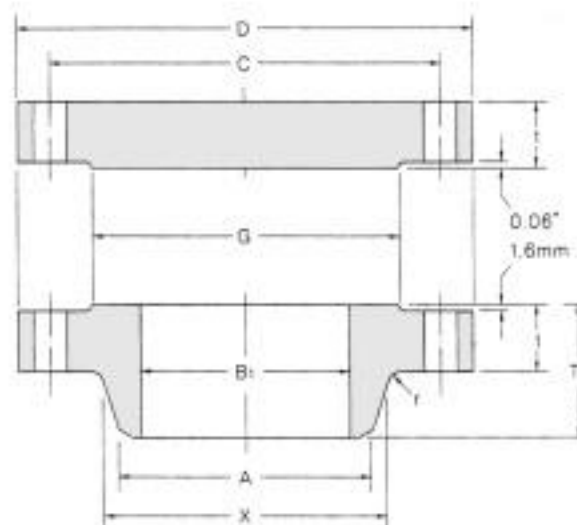BEVEL FOR WALL THICKNESS(t_o)
0.88" IN.(22.35mm) OR LESSBEVEL FOR WALL THICKNESS(t_o)
GREATER THAN 0.88 IN.(22.35mm)

CLASS 300 FLANGES



ASME B16.47 SER.B(API 605)

Unit:mm

Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding Neck		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X								A	B1
26	867	736.6	701.5	665.2	647.7	641.4	635.0	144.5	88.9	88.9	14.2	803.1	32	35.1	181.4	411.4
28	921	787.4	755.7	716.0	698.5	692.2	685.8	149.4	88.9	88.9	14.2	857.3	36	35.1	204.1	464.0
30	991	844.6	812.8	768.4	749.3	743.0	736.6	158.0	93.7	93.7	14.2	920.8	36	38.1	249.5	566.5
32	1054	901.7	863.6	819.2	800.1	793.8	787.4	168.1	103.1	103.1	15.7	977.9	32	41.1	310.7	705.8
34	1108	952.5	917.4	870.0	850.9	844.6	838.2	173.0	103.1	103.1	15.7	1031.7	36	41.1	340.2	779.7
36	1171	1009.7	965.2	920.8	901.7	895.4	889.0	180.8	103.1	103.1	15.7	1089.2	32	44.5	381.0	871.4
38	1222	1060.5	1016.0	971.6	952.5	946.2	939.8	192.0	111.3	111.3	15.7	1140.0	36	44.5	415.0	1023.8
40	1273	1114.6	1066.8	1022.4	1003.3	997.0	990.6	198.4	115.8	115.8	15.7	1190.8	40	44.5	449.1	1156.2
42	1334	1168.4	1117.6	1074.7	1054.1	1047.8	1041.4	204.7	119.1	119.1	15.7	1244.6	36	47.8	514.8	1304.6
44	1384	1219.2	1173.2	1125.5	1104.9	1098.6	1092.2	214.4	127.0	127.0	15.7	1295.4	40	47.8	560.2	1496.7
46	1461	1270.0	1228.9	1176.3	1155.7	1149.4	1143.0	222.3	130.0	128.5	15.7	1365.3	36	50.8	668.8	1708.3
48	1511	1327.2	1277.9	1227.1	1206.5	1200.2	1193.8	223.8	134.9	128.5	15.7	1416.1	40	50.8	714.4	1897.4
50	1562	1378.0	1330.5	1277.9	1257.3	1251.0	1244.6	235.0	139.7	138.2	15.7	1466.9	44	50.8	775.7	2099.7
52	1613	1428.8	1382.8	1328.7	1308.1	1301.8	1295.4	242.8	144.3	142.7	15.7	1517.7	48	50.8	834.6	2311.5
54	1673	1479.6	1435.1	1379.5	1358.9	1352.6	1346.2	239.8	149.4	136.7	15.7	1577.8	48	50.8	898.1	2575.5
56	1765	1536.7	1493.8	1430.3	1409.7	1403.4	1397.0	268.2	157.0	153.9	17.5	1651.0	36	60.5	1177.1	3012.8
58	1827	1593.9	1547.9	1481.1	1460.5	1454.2	1447.8	274.6	162.1	153.9	17.5	1712.0	40	60.5	1256.6	3332.6
60	1878	1651.0	1596.7	1531.9	1511.3	1505.0	1498.6	271.5	166.6	150.9	17.5	1763.8	40	60.5	1301.8	3619.7

Notes

- (1) "Bore" (B1) of flanges shall be specified by the purchaser.
 (2) Class 300 flanges will be furnished with 0.06" (1.6mm) raised face which is included in "Thickness" (t) and "Length thru Hub" (T1).

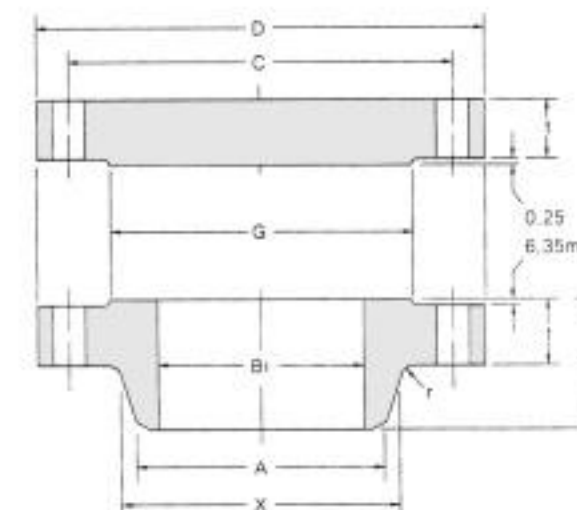BEVEL FOR WALL THICKNESS(t_o)
0.88" IN.(22.35mm) OR LESSBEVEL FOR WALL THICKNESS(t_o)
GREATER THAN 0.88 IN.(22.35mm)

CLASS 400 FLANGES


ASME B16.47 SER.B(API 605)

Unit:mm

Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X		A	B1			T1	t	t	r
26	850.9	711.2	688.8	660.4	647.7	641.4	635.0	149.4	88.9	88.9	11.2	781.1	28	38.1	163.3	396.4
28	914.4	762.0	739.6	711.2	698.5	692.2	685.8	158.8	95.3	95.3	12.7	838.2	24	41.1	204.1	490.3
30	971.6	819.2	793.8	762.0	749.3	743.0	736.6	169.9	101.6	101.6	12.7	895.4	28	41.1	240.4	590.6
32	1035.1	873.3	844.6	812.8	800.1	793.8	787.4	179.3	108.0	108.0	12.7	952.5	28	44.5	288.0	712.2
34	1085.9	927.1	898.7	863.6	850.9	844.6	838.2	187.5	111.3	111.3	14.2	1003.3	32	44.5	313.0	807.9
36	1155.7	980.9	952.5	914.4	901.7	895.4	889.0	200.2	119.1	119.1	14.2	1066.8	28	47.8	387.8	979.8
38	1206.5	1035.1	1003.3	965.2	952.5	946.2	939.8	206.2	124.0	124.0	14.2	1117.6	32	47.8	424.1	1111.3
40	1270.0	1092.2	1054.1	1016.0	1003.3	997.0	990.6	215.9	130.0	130.0	14.2	1174.8	32	50.8	494.4	1291.9
42	1320.8	1143.0	1107.9	1066.8	1054.1	1047.8	1041.4	223.8	133.4	133.4	14.2	1225.6	32	50.8	539.8	1432.9
44	1384.3	1200.2	1158.7	1117.6	1104.9	1098.6	1092.2	233.2	139.7	139.7	14.2	1282.7	32	53.8	623.7	1648.8
46	1441.5	1257.3	1212.9	1168.4	1155.7	1149.4	1143.0	244.3	146.1	146.1	14.2	1339.9	36	53.8	691.7	1868.8
48	1511.3	1308.1	1267.0	1219.2	1206.5	1200.2	1193.8	257.0	152.4	152.4	14.2	1403.4	28	60.5	811.9	2143.7
50	1568.5	1361.9	1320.8	1270.0	1257.3	1251.0	1244.6	268.2	158.8	157.2	14.2	1460.5	32	60.5	884.5	2405.4
52	1619.3	1412.7	1371.6	1320.8	1308.1	1301.8	1295.4	276.4	163.6	162.1	14.2	1511.3	32	60.5	963.9	2641.3
54	1701.8	1470.2	1425.4	1371.6	1358.9	1352.6	1346.2	289.1	171.5	169.9	14.2	1581.2	28	66.5	1163.5	3058.2
56	1752.6	1527.0	1479.6	1422.4	1409.7	1403.4	1397.0	298.5	176.3	174.8	14.2	1632.0	32	66.5	1229.3	3334.9
58	1803.4	1577.8	1530.4	1473.2	1460.5	1454.2	1447.8	306.3	180.8	177.8	14.2	1682.8	32	66.5	1465.1	3622.4
60	1886.0	1635.3	1584.5	1524.0	1511.3	1505.0	1498.6	319.0	189.0	185.7	14.2	1752.6	32	73.2	1732.8	4139.6

Notes

Dimensions for class 600,900 NPS 36" and larger as the same as for series A flanges.

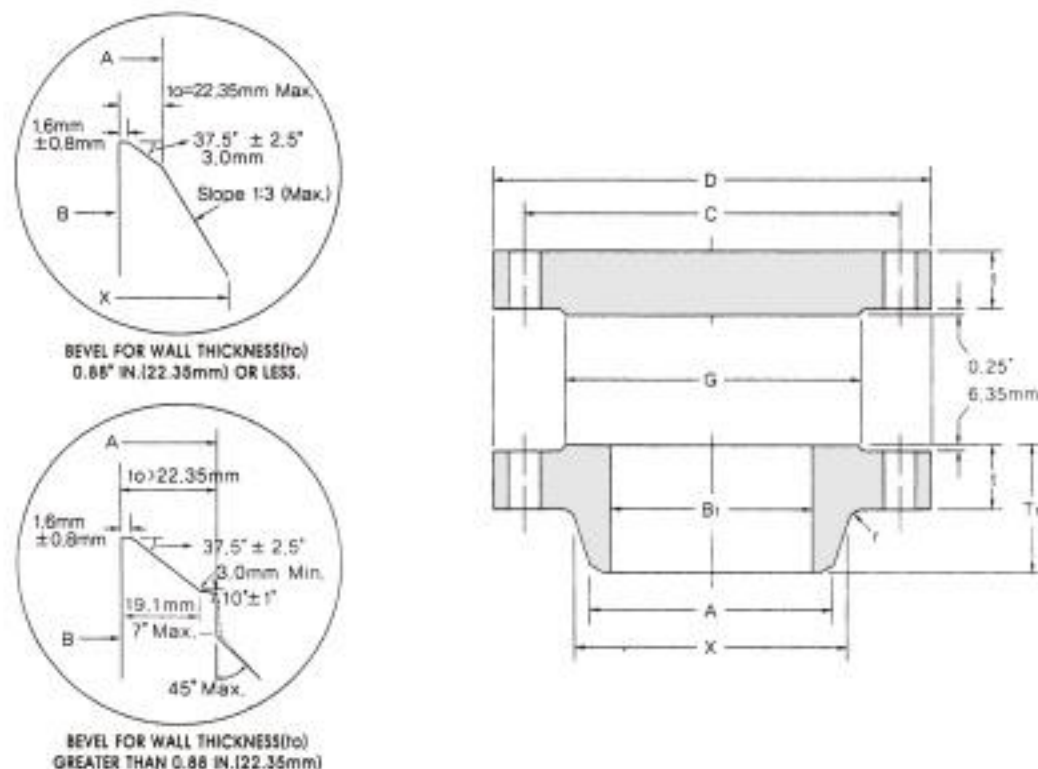

CLASS 600 FLANGES


ASME B16.47 SER.B(API 605)

Unit:mm

Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding Neck		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X								A	B1
26	889.0	726.9	698.5	660.4	647.7	641.4	635.0	180.8	111.3	111.3	12.70	806.5	28	44.5	249.5	541.6
28	952.5	784.4	752.3	711.2	698.5	692.2	685.8	190.5	115.8	115.8	12.70	863.6	28	47.8	294.8	647.3
30	1022.4	841.2	806.5	762.0	749.3	743.0	736.6	204.7	127.0	125.5	12.70	927.1	28	50.8	367.4	817.4
32	1085.9	895.4	860.6	812.8	800.1	793.8	787.4	215.9	134.9	130.0	12.70	984.3	28	53.8	430.9	979.3
34	1162.1	952.5	914.4	863.6	850.9	844.6	838.2	233.4	144.3	141.2	14.22	1054.1	24	60.5	546.6	1199.8
36	1212.9	1009.7	968.2	914.4	901.7	895.4	889.0	242.6	150.9	146.1	14.22	1104.9	28	60.5	607.8	1366.7
38	1270.0	1054.1	1022.4	965.2	952.5	946.2	939.8	254.0	155.4	152.4	14.22	1162.3	28	60.5	666.8	1544.1
40	1320.8	1111.3	1073.2	1016.0	1003.3	997.0	990.6	263.7	162.1	158.8	14.22	1212.9	32	60.5	739.4	1740.9
42	1403.4	1168.4	1127.3	1066.8	1054.1	1047.8	1041.4	279.4	171.5	166.1	14.22	1282.7	28	66.5	820.8	2079.8
44	1454.2	1225.6	1181.1	1117.6	1104.9	1098.6	1092.2	289.1	177.8	173.0	14.22	1333.5	32	66.5	979.8	2315.6
46	1511.3	1276.4	1234.9	1168.4	1155.7	1149.4	1143.0	300.0	185.7	179.3	14.22	1390.7	32	66.5	1093.2	2611.8
48	1593.9	1333.5	1289.1	1219.2	1206.5	1200.2	1193.8	316.0	195.3	189.0	14.22	1460.5	32	73.2	1295.0	3055.9
50	1670.1	1384.3	1343.2	1270.0	1257.3	1251.0	1244.6	328.7	203.2	196.9	14.22	1524.0	28	79.2	1510.5	3490.5
52	1720.9	1435.1	1394.0	1320.8	1308.1	1301.8	1295.4	336.6	209.6	203.2	14.22	1574.8	32	79.2	1614.8	3822.0
54	1778.0	1492.3	1447.8	1371.6	1358.9	1352.6	1346.2	349.3	217.4	209.6	14.22	1632.0	32	79.2	1778.1	4233.4
56	1854.2	1543.1	1501.6	1422.4	1409.7	1403.4	1397.0	362.0	225.6	217.4	15.75	1695.5	32	85.9	1941.4	4776.0
58	1905.0	1600.2	1552.4	1473.2	1460.5	1454.2	1447.8	369.8	231.6	222.3	15.75	1746.3	32	85.9	2104.7	5177.4
60	1993.9	1657.4	1609.9	1524.0	1511.3	1505.0	1498.6	388.9	242.8	233.4	17.53	1822.5	28	91.9	2268.0	5945.8

Notes

Dimensions for class 600,900 NPS 36" –and larger as the same as for series A flanges.

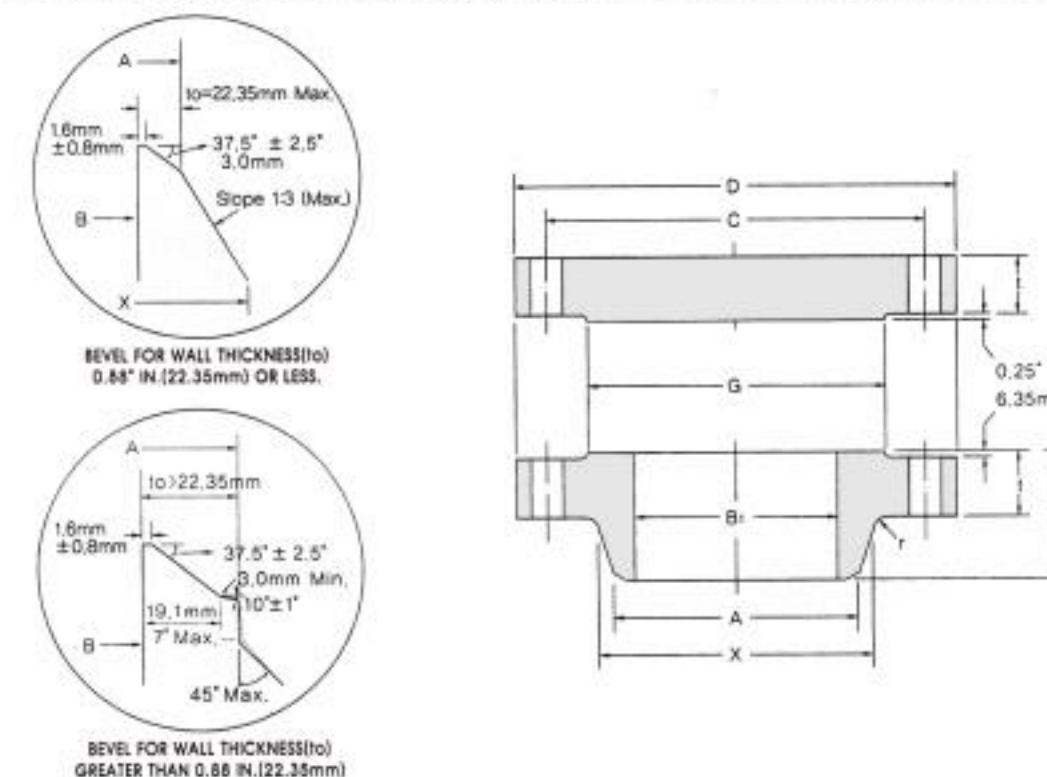

CLASS 900 FLANGES

ASME B16.47 SER.B(API 605)

Unit:mm

Nominal Pipe Size	Outside Diam.	O.D of Raised Face	Diam. of Hub at Base	Diam. of Hub at Bevel	BORE			Length Thru Hub	THICKNESS		Radius at Base of Hub	DRILLING			Approximate Weight(kg)	
					Wall Thickness				Blind	Welding		Bolt Circle Diam	Number of Holes	Diam. of Holes		
					6.35mm	9.5mm	12.7mm									
					D	G	X	A	B1			T1	t	t	r	c
26	1022.4	762.0	743.0	660.4	647.7	641.4	635.0	258.8	153.9	134.9	11.2	901.7	20	66.5	476.3	990.7
28	1104.9	819.2	797.1	711.2	698.5	692.2	685.8	276.4	166.6	147.6	12.7	971.6	20	73.2	689.5	1252.8
30	1181.1	876.3	850.9	762.0	749.3	743.0	736.6	289.1	176.0	155.4	12.7	1035.1	20	79.2	825.6	1512.3
32	1238.3	927.1	908.1	812.8	800.1	793.8	787.4	303.3	185.7	160.3	12.7	1092.2	20	79.2	936.7	1753.2
34	1314.5	990.6	962.2	863.6	850.9	844.6	838.2	319.0	195.1	171.5	14.2	1155.7	20	85.9	1111.3	2075.7
36	1346.2	1028.7	1016.0	914.4	901.7	895.4	889.0	325.4	201.7	173.0	14.2	1200.2	24	79.2	1143.1	2251.2
38	1460.5	1098.6	1073.2	965.2	952.5	946.2	939.8	352.6	215.9	190.5	19.1	1289.1	20	91.9	1535.4	2836.4
40	1511.3	1162.1	1127.3	1016.0	1003.3	997.0	990.6	363.5	223.8	196.9	20.6	1339.9	24	91.9	1642.0	3148.0
42	1562.1	1212.9	1176.3	1066.8	1054.1	1047.8	1041.4	371.3	231.6	206.2	20.6	1390.7	24	91.9	1796.3	3481.4
44	1648.0	1270.0	1234.9	1117.6	1104.9	1098.6	1092.2	390.7	242.8	214.4	22.4	1463.5	24	98.6	1950.5	4061.5
46	1733.6	1333.5	1292.4	1168.4	1155.7	1149.4	1143.0	411.0	255.5	225.6	22.4	1536.7	24	104.6	2104.7	4729.2
48	1784.4	1384.3	1343.2	1219.2	1206.5	1200.2	1193.8	419.1	263.7	233.4	23.9	1587.5	24	104.6	2258.9	5170.1

Notes

Dimensions for class 600,900 NPS 36" –and larger as the same as for series A flanges.