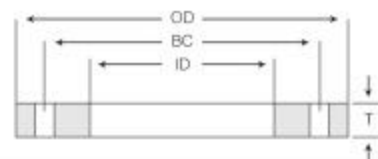
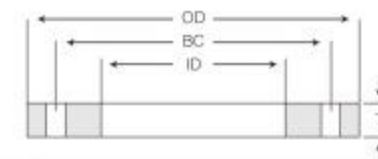


AWWA C207-07 –Rings & Blinds.
CLASS B

Nominal Size	Outside Diameter (OD)	Slip-on Bore (ID)	NO. of Bolt Holes	Diameter Bolt Holes	Bolt Circle (BC)	Thickness (T)		Weight Each	
						CLASS B			
						Slip-on	Blind	Slip-on	Blind
4	228.6	116.1	8	19.1	190.5	15.9	15.9	3.52	4.84
5	254	143.8	8	22.2	215.9	15.9	15.9	3.91	5.94
6	279.4	170.7	8	22.2	241.3	17.5	17.5	4.86	8
8	342.9	221.5	8	22.2	298.5	17.5	17.5	6.97	12.27
10	406.4	276.4	12	25.4	362	17.5	17.5	8.75	17
12	482.6	327.2	12	25.4	431.8	17.5	18.3	12.75	25.42
14	533.4	360.4	12	28.6	476.3	17.5	20.1	15.64	34.07
16	596.9	411.2	16	28.6	539.8	17.5	22.7	18.8	48.07
18	635	462	16	31.8	577.9	17.5	24.1	18.74	57.55
20	698.5	512.8	20	31.8	635	17.5	26.4	22.1	76.18
22	749.3	563.6	20	34.9	692.2	19.1	28.8	25.86	95.44
24	812.8	614.4	20	34.9	749.3	19.1	30.9	30.5	121.31
26	869.95	666.8	24	34.9	806.5	20.6	33.2	35.96	149.04
28	927.1	717.6	28	34.9	863.3	22.2	35.5	42.52	180.79
30	984.25	768.4	28	34.9	914.4	22.2	37.5	47.15	216.25
32	1060.5	819.2	28	41.3	977.9	23.8	40.2	59.59	267.11
34	1111.3	870	32	41.3	1028.7	23.8	42.2	62.19	307.35
36	1168.4	920.8	32	41.3	1085.9	25.4	44.5	72.51	359.84
38	1238.3	971.6	32	41.3	1149.4	25.4	47.1	83.81	429.75
40	1289.1	1022.4	36	41.3	1200.2	25.4	49.1	86.99	484.83
42	1346.2	1073.2	36	41.3	1257.3	28.6	51.4	105.72	555.26
44	1403.4	1124	40	41.3	1314.5	28.6	53.7	112.57	629.96
48	1511.3	1225.6	44	41.3	1422.4	31.8	58	138.69	790.5
54	1682.8	1378	44	47.6	1593.9	34.9	65	179.42	1095.72
60	1854.2	1530.4	52	47.6	1759	38.1	71.6	229.93	1466.79
66	2032	1682.8	52	47.6	1930.4	41.3	78.5	300.53	1942.81
72	2197.1	1835.2	60	47.6	2095.5	44.5	85.2	363.34	2466.14
78	2362.2	1987.6	64	54	2260.6	50.8		452.23	
84	2533.7	2140	64	54	2425.7	50.8		518.24	
90	2705.1	2292.4	68	61.9	2590.8	57.2		635.94	
96	2876.6	2444.8	68	61.9	2755.9	57.2		718.99	
102	3048	2597.2	72	68.3	2908.3	63.5		865.47	
108	3219.5	2749.6	72	68.3	3067.1	63.5		967.34	
120	3562.4	3054.4	76	74.6	3371.9	69.9		1267.3	
132	3905.3	3359.2	80	81	3702.1	76.2		1618.4	
144	4248.2	3664	84	87.3	4019.6	82.6		2029.5	

AWWA C207-07 –Rings & Blinds.
CLASS D

Nominal Size	Outside Diameter (OD)	Slip-on Bore (ID)	NO. of Bolt Holes	Diameter Bolt Holes	Bolt Circle (BC)	Thickness (T)		Weight Each	
						CLASS D			
						Slip-on	Blind	Slip-on	Blind
4	228.6	116.1	8	19.1	190.5	15.9	15.9	3.52	4.84
5	254	143.8	8	22.2	215.9	15.9	16.5	3.91	6.17
6	279.4	170.7	8	22.2	241.3	17.5	17.6	4.86	8.05
8	342.9	221.5	8	22.2	298.5	17.5	20.6	6.97	14.44
10	406.4	276.4	12	25.4	362	17.5	24.2	8.75	23.5
12	482.6	327.2	12	25.4	431.8	20.6	28.4	15.01	39.45
14	533.4	360.4	12	28.6	476.3	23.8	28.8	21.27	48.81
16	596.9	411.2	16	28.6	539.8	25.4	32.1	27.29	67.97
18	635	462	16	31.8	577.9	27	33.8	28.92	80.72
20	698.5	512.8	20	31.8	635	28.6	36.8	36.12	106.19
22	749.3	563.6	20	34.9	692.2	30.2	39.8	40.89	131.89
24	812.8	614.4	20	34.9	749.3	31.8	42.2	50.78	165.67
26	869.95	666.8	24	34.9	806.5	33.3	45.4	58.14	203.81
28	927.1	717.6	28	34.9	863.3	33.3	48.4	63.79	246.49
30	984.25	768.4	28	34.9	914.4	34.9	51	74.12	294.1
32	1060.5	819.2	28	41.3	977.9	38.1	54.6	95.4	362.79
34	1111.3	870	32	41.3	1028.7	38.1	57.2	99.56	416.59
36	1168.4	920.8	32	41.3	1085.9	41.3	60.2	117.91	486.79
38	1238.3	971.6	32	41.3	1149.4	41.3	63.7	136.28	581.21
40	1289.1	1022.4	36	41.3	1200.2	41.3	66.3	141.44	654.67
42	1346.2	1073.2	36	41.3	1257.3	44.5	69.3	164.49	748.63
44	1403.4	1124	40	41.3	1314.5	44.5	72.4	175.15	849.33
48	1511.3	1225.6	44	41.3	1422.4	47.6	78	207.61	1063.09
54	1682.8	1378	44	47.6	1593.9	54	87.2	277.62	1469.95
60	1854.2	1530.4	52	47.6	1759	57.2	96	345.2	1966.64
66	2032	1682.8	52	47.6	1930.4	63.5	105	462.08	2598.66
72	2197.1	1835.2	60	47.6	2095.5	66.7	114	544.61	3299.77
78	2362.2	1987.6	64	54	2260.6	69.9		622.26	
84	2533.7	2140	64	54	2425.7	73		744.71	
90	2705.1	2292.4	68	61.9	2590.8	76.2		847.18	
96	2876.6	2444.8	68	61.9	2755.9	82.6		1038.26	
102	3048	2597.2	72	68.3	2908.3	82.6		1125.79	
108	3219.5	2749.6	72	68.3	3067.1	85.7		1305.53	
120	3562.4	3054.4	76	74.6	3371.9	88.9		1611.74	
132	3905.3	3359.2	80	81	3702.1	98.4		2089.89	
144	4248.2	3664	84	87.3	4019.6	105		2579.82	