


BS4504 FLANGE




BS4504 101 PN6

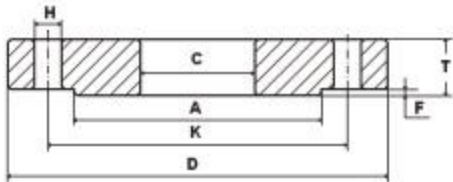


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘高	水线台	水线高	FF 单重	RF单重
PN	英寸	DN	D	K	H	—	C	T	A	f	KG	KG
BS4504 101 PN6 平板法兰	3/8	10	75	50	11	4	18.0	12	35	2	0.36	0.31
	1/2	15	80	55	11	4	22.0	12	40	2	0.40	0.35
	3/4	20	90	65	11	4	27.5	14	50	2	0.59	0.53
	1	25	100	75	11	4	34.5	14	60	2	0.72	0.65
	1-1/4	32	120	90	14	4	43.5	16	70	2	1.16	1.05
	1-1/2	40	130	100	14	4	49.5	16	80	3	1.35	1.17
	2	50	140	110	14	4	61.5	16	90	3	1.48	1.29
	2-1/2	65	160	130	14	4	77.5	16	110	3	1.86	1.62
	3	80	190	150	18	4	90.5	18	128	3	2.96	2.61
	4	100	210	170	18	4	116.0	18	148	3	3.26	2.87
	5	125	240	200	18	8	141.5	20	178	3	4.32	3.89
	6	150	265	225	18	8	170.5	20	202	3	4.76	4.26
	8	200	320	280	18	8	221.5	22	258	3	6.89	6.27
	10	250	375	335	18	12	276.5	24	312	3	8.93	8.20
	12	300	440	395	22	12	327.5	24	365	4	11.93	10.58
	14	350	490	445	22	12	359.5	26	415	4	16.85	15.32
	16	400	540	495	22	16	411.0	28	465	4	19.86	18.19
	18	450	595	550	22	16	462.0	30	520	4	24.59	22.72
	20	500	654	600	22	20	513.5	30	570	4	26.41	24.40
	24	600	755	705	26	20	616.5	32	670	5	34.83	31.52

BS4504 101 PN10

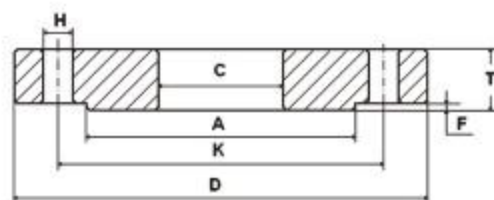


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘高	水线台	水线高	FF 单重	RF 单重
PN	英寸	DN	D	K	H	—	C	T	A	f	KG	KG
BS4504 101 PN10 平板法兰	3/8	10	90	60	14	4	18.0	14	40	2	0.60	0.53
	1/2	15	95	65	14	4	22.0	14	45	2	0.67	0.59
	3/4	20	105	75	14	4	27.5	16	58	2	0.94	0.85
	1	25	115	85	14	4	34.5	16	68	2	1.11	1.01
	1-1/4	32	140	100	18	4	43.5	18	78	2	1.82	1.67
	1-1/2	40	150	110	18	4	49.5	18	88	3	2.08	1.83
	2	50	165	125	18	4	61.5	20	102	3	2.73	2.45
	2-1/2	65	185	145	18	4	77.5	20	122	3	3.32	2.99
	3	80	200	160	18	8	90.5	20	138	3	3.61	3.27
	4	100	220	180	18	8	116.0	22	158	3	4.39	4.01
	5	125	250	210	18	8	141.5	22	188	3	5.41	4.96
	6	150	285	240	22	8	170.5	24	212	3	7.15	6.55
	8	200	340	295	22	8	221.5	24	268	3	9.28	8.54
	10	250	395	350	22	12	276.5	26	320	3	11.83	10.95
	12	300	445	400	22	12	327.5	26	370	4	13.63	12.26
	14	350	505	460	22	16	359.5	26	430	4	20.39	18.85
	16	400	565	515	26	16	411.0	32	482	4	27.54	25.66
	18	450	615	565	26	20	462.0	36	532	4	33.60	31.58
	20	500	670	620	26	20	513.5	38	585	4	40.26	37.96
	24	600	780	725	30	20	616.5	42	685	5	54.50	50.77

BS4504 101 PN16

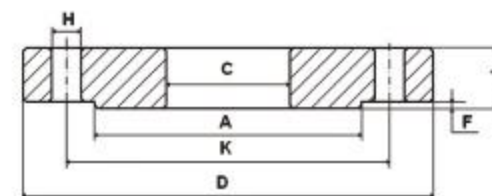


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘高	水线台	水线高	FF 单重	RF 单重
PN	英寸	DN	D	K	H	—	C	T	A	f	KG	KG
BS4504 101 PN16 平板法兰	3/8	10	90	60	14	4	18.0	14	40	2	0.60	0.53
	1/2	15	95	65	14	4	22.0	14	45	2	0.67	0.59
	3/4	20	105	75	14	4	27.5	16	58	2	0.94	0.85
	1	25	115	85	14	4	34.5	16	68	2	1.11	1.01
	1-1/4	32	140	100	18	4	43.5	18	78	2	1.82	1.67
	1-1/2	40	150	110	18	4	49.5	18	88	3	2.08	1.83
	2	50	165	125	18	4	61.5	20	102	3	2.73	2.45
	2-1/2	65	185	145	18	4	77.5	20	122	3	3.32	2.99
	3	80	200	160	18	8	90.5	20	138	3	3.61	3.27
	4	100	220	180	18	8	116.0	22	158	3	4.39	4.01
	5	125	250	210	18	8	141.5	22	188	3	5.41	4.96
	6	150	285	240	22	8	170.5	24	212	3	7.15	6.55
	8	200	340	295	22	12	221.5	26	268	3	9.74	9.04
	10	250	405	355	26	12	276.5	29	320	3	14.22	13.23
	12	300	460	410	26	12	327.5	32	378	4	19.00	17.50
	14	350	520	470	26	16	359.5	35	438	4	28.23	26.55
	16	400	580	525	30	16	411.0	38	490	4	35.89	33.87
	18	450	640	585	30	20	462.0	42	550	4	46.17	43.97
	20	500	715	650	33	20	513.5	46	610	4	64.08	61.18
	24	600	840	770	36	20	616.5	52	725	5	96.13	91.37

BS4504 101 PN25

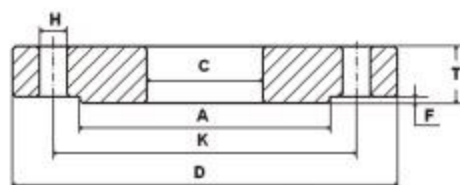


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘高	水线台	水线高	FF 单重	RF 单重
PN	英寸	DN	D	K	H	—	C	T	A	f	KG	KG
BS4504 101 PN25 平板法兰	3/8	10	90	60	14	4	18.0	14	40	2	0.60	0.53
	1/2	15	95	65	14	4	22.0	14	45	2	0.67	0.59
	3/4	20	105	75	14	4	27.5	16	58	2	0.94	0.85
	1	25	115	85	14	4	34.5	16	68	2	1.11	1.01
	1-1/4	32	140	100	18	4	43.5	18	78	2	1.82	1.67
	1-1/2	40	150	110	18	4	49.5	18	88	3	2.06	1.83
	2	50	165	125	18	4	61.5	20	102	3	2.73	2.45
	2-1/2	65	185	145	18	8	77.5	22	122	3	3.48	3.17
	3	80	200	160	18	8	90.5	24	138	3	4.33	3.99
	4	100	235	190	22	8	116.0	26	162	3	6.08	5.61
	5	125	270	220	26	8	141.5	28	188	3	8.20	7.61
	6	150	300	250	26	8	170.5	30	218	3	10.28	9.59
	8	200	360	310	26	12	221.5	32	278	3	14.30	13.48
	10	250	425	370	30	12	276.5	35	335	3	20.16	19.10
	12	300	485	430	30	16	327.5	38	395	4	26.63	25.03
	14	350	555	490	33	16	359.5	42	450	4	41.82	39.64
	16	400	620	550	36	16	411.0	46	505	4	55.27	52.59
	18	450	670	600	36	20	462.0	50	555	4	64.64	61.80
	20	500	730	660	36	20	513.5	56	615	4	84.06	80.89
	24	600	845	770	39	20	616.5	68	720	5	127.35	122.25

BS4504 101 PN40

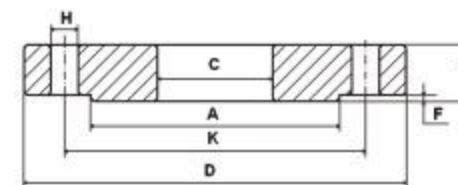


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘高	水线台	水线高	FF 单重	RF 单重
PN	英寸	DN	D	K	H	—	C	T	A	f	KG	KG
BS4504 112 PN40 平板法兰	3/8	10	90	60	14	4	18.0	14	40	2	0.60	0.53
	1/2	15	95	65	14	4	22.0	14	45	2	0.67	0.59
	3/4	20	105	75	14	4	27.5	16	58	2	0.94	0.85
	1	25	115	85	14	4	34.5	16	68	2	1.11	1.01
	1-1/4	32	140	100	18	4	43.5	18	78	2	1.82	1.67
	1-1/2	40	150	110	18	4	49.5	18	88	3	2.06	1.83
	2	50	165	125	18	4	61.5	20	102	3	2.73	2.45
	2-1/2	65	185	145	18	8	77.5	22	122	3	3.48	3.17
	3	80	200	160	18	8	90.5	24	138	3	4.33	3.99
	4	100	235	190	22	8	116.0	26	162	3	6.08	5.61
	5	125	270	220	26	8	141.5	28	188	3	8.20	7.61
	6	150	300	250	26	8	170.5	30	218	3	10.28	9.59
	8	200	375	320	30	12	221.5	36	285	3	17.94	17.04
	10	250	450	385	33	12	276.5	42	345	3	29.28	27.97
	12	300	515	450	33	16	327.5	48	410	4	41.62	39.66
	14	350	580	510	36	16	359.5	54	465	4	62.11	59.66
	16	400	660	585	39	16	411.0	60	535	4	89.72	86.63

BS4504 105 PN6 BL

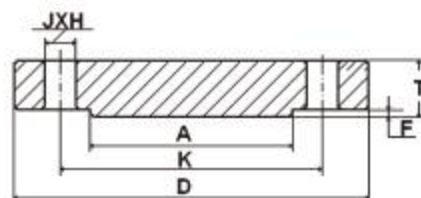


压力	通径	外径	中心距	孔径	孔数	厚度	水线台	水线高	FF 单重	RF单重
PN	DN	D	K	H	J	T	A	f	KG	KG
BS4504 105 PN6 BL 盲板法兰	10	75	50	11	4	12	35	2	0.38	0.33
	15	80	55	11	4	12	40	2	0.44	0.38
	20	90	65	11	4	14	50	2	0.66	0.59
	25	100	75	11	4	14	60	2	0.82	0.75
	32	120	90	14	4	14	70	2	1.18	1.07
	40	130	100	14	4	14	80	3	1.39	1.21
	50	140	110	14	4	14	90	3	1.63	1.43
	65	160	130	14	4	14	110	3	2.14	1.91
	80	190	150	18	4	16	128	3	3.44	3.09
	100	210	170	18	4	16	148	3	4.23	3.84
	125	240	200	18	8	18	178	3	6.11	5.68
	150	265	225	18	8	18	202	3	7.51	7.01
	200	320	280	18	8	20	258	3	12.32	11.70
	250	375	335	18	12	22	312	3	18.56	17.83
	300	440	395	22	12	22	365	4	25.49	24.14
	350	490	445	22	12	22	415	4	31.80	30.27
	400	540	495	22	16	22	465	4	38.53	36.86
	450	595	550	22	16	24	520	4	51.28	49.40
	500	645	600	22	20	24	570	4	60.17	58.16
	600	755	705	26	20	34	670	5	116.74	113.42
	700	860	810	26	24	36	775	5	160.68	156.89
	800	975	920	30	24	42	880	5	240.75	235.98
	900	1075	1020	30	24	46	980	5	321.86	316.50
	1000	1175	1120	30	28	52	1080	5	434.87	429.04
	1200	1405	1340	33	32	60	1295	5	717.88	709.80
	1400	1630	1560	36	36	68	1510	5	1095.15	1084.97
	1600	1830	1760	36	40	76	1710	5	1546.06	1534.55
	1800	2045	1970	39	44	84	1920	5	2132.77	2119.55
	2000	2265	2180	42	48	92	2125	5	2864.06	2847.71

BS4504 105 PN10 BL

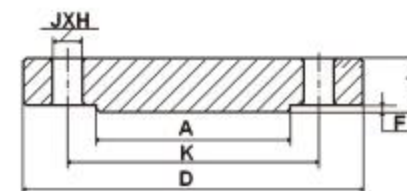


压力	通径	外径	中心距	孔径	孔数	厚度	水线台	水线高	FF 单重	RF单重
PN	DN	D	K	H	J	T	A	f	KG	KG
BS4504 105 PN10 BL 盲板法兰	10	90	60	14	4	14	40	2	0.63	0.56
	15	95	65	14	4	14	45	2	0.71	0.64
	20	105	75	14	4	16	58	2	1.01	0.93
	25	115	85	14	4	16	68	2	1.23	1.13
	32	140	100	18	4	16	78	2	1.81	1.66
	40	150	110	18	4	18	88	3	2.35	2.11
	50	165	125	18	4	18	102	3	2.88	2.59
	65	185	145	18	4	20	122	3	4.06	3.73
	80	200	160	18	8	20	138	3	4.62	4.28
	100	220	180	18	8	22	158	3	6.22	5.83
	125	250	210	18	8	22	188	3	8.13	7.68
	150	285	240	22	8	24	212	3	11.45	10.85
	200	340	295	22	8	24	268	3	16.54	15.81
	250	395	350	22	12	26	320	3	24.10	23.21
	300	445	400	22	12	26	370	4	30.84	29.47
	350	505	460	22	16	26	430	4	39.67	38.13
	400	565	515	26	16	26	482	4	49.47	47.60
	450	615	565	26	20	28	532	4	63.01	60.99
	500	670	620	26	20	28	585	4	75.22	72.92
	600	780	725	30	20	34	685	5	123.85	120.12
	700	895	840	30	24	38	800	5	182.74	178.44
	800	1015	950	33	24	42	905	5	260.20	254.49
	900	1115	1050	33	28	46	1005	5	344.20	337.94
	1000	1230	1160	36	28	52	1110	5	473.76	466.21
	1200	1455	1380	39	32	60	1330	5	765.70	756.47

BS4504 105 PN16 BL

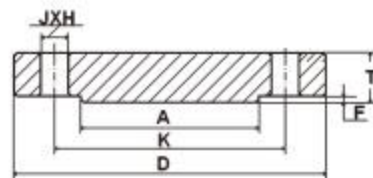


压力	通径	外径	中心距	孔径	孔数	厚度	水线台	水线高	FF 单重	RF 单重
PN	DN	D	K	H	J	T	A	f	KG	KG
BS4504 105 PN16 BL 盲板法兰	10	90	60	14	4	14	40	2	0.63	0.56
	15	95	65	14	4	14	45	2	0.71	0.64
	20	105	75	14	4	16	58	2	1.01	0.93
	25	115	85	14	4	16	68	2	1.23	1.13
	32	140	100	18	4	16	78	2	1.81	1.66
	40	150	110	18	4	18	88	3	2.35	2.11
	50	165	125	18	4	18	102	3	2.88	2.59
	65	185	145	18	4	20	122	3	4.06	3.73
	80	200	160	18	8	20	138	3	4.62	4.28
	100	220	180	18	8	22	158	3	6.22	5.83
	125	250	210	18	8	22	188	3	8.13	7.68
	150	285	240	22	8	24	212	3	11.45	10.85
	200	340	295	22	12	26	268	3	17.61	16.91
	250	405	355	26	12	28	320	3	26.94	25.95
	300	460	410	26	12	30	378	4	37.67	36.17
	350	520	470	26	16	32	438	4	51.25	49.58
	400	580	525	30	16	36	490	4	71.52	69.50
	450	640	585	30	20	36	550	4	86.98	84.78
	500	715	650	33	20	44	610	4	132.87	129.98
	600	840	770	36	20	48	725	5	201.29	196.54
	800	1025	950	39	24	52	900	5	325.37	319.07

BS4504 105 PN25 BL

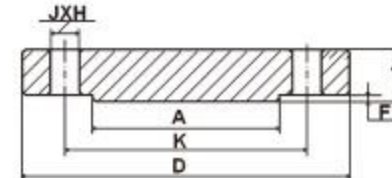


压力	通径	外径	中心距	孔径	孔数	厚度	水线台	水线高	FF 单重	RF 单重
PN	DN	D	K	H	J	T	A	f	KG	KG
BS4504 105 PN25 BL 盲板法兰	10	90	60	14	4	16	40	2	0.72	0.65
	15	95	65	14	4	16	45	2	0.81	0.74
	20	105	75	14	4	18	58	2	1.14	1.05
	25	115	85	14	4	18	68	2	1.38	1.29
	32	140	100	18	4	18	78	2	2.03	1.88
	40	150	110	18	4	18	88	3	2.35	2.11
	50	165	125	18	4	20	102	3	3.20	2.91
	65	185	145	18	8	22	122	3	4.29	3.98
	80	200	160	18	8	24	138	3	5.54	5.20
	100	235	190	22	8	24	162	3	7.60	7.14
	125	270	220	26	8	26	188	3	10.83	10.23
	150	300	250	26	8	28	218	3	14.61	13.93
	200	360	310	26	12	30	278	3	22.49	21.67
	250	425	370	30	12	32	335	3	33.53	32.46
	300	485	430	30	16	34	395	4	46.32	44.73
	350	555	490	33	16	38	450	4	68.13	65.96
	400	620	550	36	16	40	505	4	89.75	87.07
	450	670	600	36	20	44	555	4	114.83	111.99
	500	730	660	36	20	45	615	4	140.76	137.59
	600	845	770	39	20	54	720	5	227.76	222.67

BS4504 105 PN40 BL




压力	通径	外径	中心距	孔径	孔数	厚度	水线台	水线高	FF 单重	RF 单重
PN	DN	D	K	H	J	T	A	f	KG	KG
BS4504 105 PN40 BL 法兰盲板	10	90	60	14	4	16	40	2	0.72	0.65
	15	95	65	14	4	16	45	2	0.81	0.74
	20	105	75	14	4	18	58	2	1.14	1.05
	25	115	85	14	4	18	68	2	1.38	1.29
	32	140	100	18	4	18	78	2	2.03	1.88
	40	150	110	18	4	18	88	3	2.35	2.11
	50	165	125	18	4	20	102	3	3.20	2.91
	65	185	145	18	8	22	122	3	4.29	3.98
	80	200	160	18	8	24	138	3	5.54	5.20
	100	235	190	22	8	24	162	3	7.60	7.14
	125	270	220	26	8	26	188	3	10.83	10.23
	150	300	250	26	8	28	218	3	14.61	13.93
	200	375	320	30	12	34	285	3	27.23	26.34
	250	450	385	33	12	38	345	3	44.41	43.11
	300	515	450	33	16	42	410	4	64.22	62.25
	350	580	510	36	16	46	465	4	89.59	87.14
	400	660	585	39	16	50	535	4	126.67	123.79
	450	685	610	39	20	54	560	4	146.20	143.11
	500	755	670	42	20	56	615	4	184.77	180.90
	600	890	795	48	20	70	735	5	322.21	315.86

BS4504 111 PN6




压力	尺寸	通径	外径	中心	孔径	孔数	小头	盘厚	总高	直颈	大头	R	水线	线高	壁厚	内径	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	N	T	F	t	M	R	A	f	S	—	KG	KG
BS4504 111 PN6 高频法兰 (对焊法兰)	3/8	10	75	50	11	4	17.2	12	28	6	26	4	35	2.0	1.8	13.6	0.35	0.39
	1/2	15	80	55	11	4	21.3	12	30	6	30	4	40	2.0	2.0	17.3	0.40	0.46
	3/4	20	90	65	11	4	26.9	14	32	6	38	4	50	2.0	2.3	22.3	0.61	0.68
	1	25	100	75	11	4	33.7	14	35	6	42	4	60	2.0	2.6	28.5	0.76	0.83
	1-1/4	32	120	90	14	4	42.4	14	35	6	55	6	70	2.0	2.6	37.2	1.08	1.18
	1-1/2	40	130	100	14	4	48.3	14	38	7	62	6	80	3.0	2.6	43.1	1.23	1.41
	2	50	140	110	14	4	60.3	14	38	8	74	6	90	3.0	2.9	54.5	1.40	1.60
	2-1/2	65	160	130	14	4	76.1	14	38	9	88	6	110	3.0	2.9	70.3	1.75	1.98
	3	80	190	150	18	4	88.9	16	42	10	102	8	128	3.0	3.2	82.5	2.79	3.13
	4	100	210	170	18	4	114.3	16	45	10	130	8	148	3.0	3.6	107.1	3.32	3.71
	5	125	240	200	18	8	139.7	18	48	10	155	8	178	3.0	4.0	131.7	4.56	4.99
	6	150	265	225	18	8	168.3	18	48	12	184	10	202	3.0	4.5	159.3	5.24	5.74
	8	200	320	280	18	8	219.1	20	55	15	236	10	258	3.0	5.6	207.9	8.22	8.83
	10	250	375	335	18	12	273.0	22	60	15	290	12	312	3.0	6.3	260.4	11.31	12.04
	12	300	440	395	22	12	323.9	22	62	15	342	12	365	4.0	7.1	309.7	14.81	16.16
	14	350	490	445	22	12	355.6	22	62	15	385	12	415	4.0	7.1	341.4	19.53	21.06
	16	400	540	495	22	16	406.4	22	65	15	438	12	465	4.0	7.1	392.2	22.46	24.13
	18	450	595	550	22	16	457.0	22	65	15	492	12	520	4.0	7.1	442.8	26.23	28.10
	20	500	645	600	22	20	508.0	24	68	15	538	12	570	4.0	7.1	493.8	30.11	32.12
	24	600	755	705	26	20	610.0	24	70	16	640	12	670	5.0	7.1	595.8	36.64	39.96
	28	700	860	810	26	24	711.0	24	70	16	740	12	775	5.0	7.1	696.8	43.02	46.81
	32	800	975	920	30	24	813.0	24	70	16	840	12	880	5.0	7.1	796.8	51.09	55.86
	36	900	1075	1020	30	24	914.0	26	70	16	942	12	980	5.0	7.1	899.8	60.67	66.03
	40	1000	1175	1120	30	28	1016.0	26	70	16	1045	16	1080	5.0	7.1	1001.8	66.44	72.27
		1200	1405	1340	33	32	1219.0	28	90	20	1248	16	1295	5.0	8.0	1203.0	105.33	113.42
		1400	1630	1560	36	36	1422.0	32	90	20	1452	16	1510	5.0	8.0	1406.0	146.41	156.60
		1600	1830	1760	36	40	1626.0	34	90	20	1655	16	1710	5.0	9.0	1608.0	174.21	185.72
		1800	2045	1970	39	44	1829.0	36	100	20	1855	16	1920	5.0	10.0	1809.0	221.51	234.74
		2000	2265	2180	42	48	2032.0	38	110	25	2058	16	2125	5.0	11.0	2010.0	262.44	296.79

BS4504 111 PN10




压力	尺寸	通径	外径	中心	孔径	孔数	小头	盘厚	总高	直颈	大头	R	水线	线高	壁厚	内径	RF单重	FF单重
PN	英寸	DN	D	K	H	—	N	T	F	t	M	R	A	f	S	—	KG	KG
BS4504 111 PN10 高颈法兰 (对焊法兰)	3/8	10	90	60	14	4	17.2	14	35	6	28	3	40	2.0	1.8	13.6	0.59	0.66
	1/2	15	95	65	14	4	21.3	14	35	6	32	3	45	2.0	2.0	17.3	0.66	0.74
	3/4	20	105	75	14	4	26.9	16	38	6	39	4	58	2.0	2.3	22.3	0.96	1.04
	1	25	115	85	14	4	33.7	16	38	6	46	4	68	2.0	2.6	28.5	1.16	1.25
	1-1/4	32	140	100	18	4	42.4	16	40	6	56	5	78	2.0	2.6	37.2	1.67	1.82
	1-1/2	40	150	110	18	4	48.3	16	42	7	64	5	88	3.0	2.6	43.1	1.87	2.12
	2	50	165	125	18	4	60.3	18	45	8	74	5	102	3.0	2.9	54.5	2.52	2.81
	2-1/2	65	185	145	18	4	76.1	18	45	10	92	6	122	3.0	2.9	70.3	3.13	3.46
	3	80	200	160	18	8	88.9	20	50	10	110	6	138	3.0	3.2	82.5	4.01	4.35
	4	100	220	180	18	8	114.3	20	52	12	130	6	158	3.0	3.6	107.1	4.53	4.92
	5	125	250	210	18	8	139.7	22	55	12	158	6	188	3.0	4.0	131.7	6.30	6.76
	6	150	285	240	22	8	168.3	22	55	12	184	8	212	3.0	4.5	159.3	7.61	8.21
	8	200	340	295	22	8	219.1	24	62	16	234	8	268	3.0	5.6	207.9	11.31	12.04
	10	250	395	350	22	12	273.0	26	68	16	288	10	320	3.0	6.3	260.4	15.15	16.04
	12	300	445	400	22	12	323.9	26	68	16	342	10	370	4.0	7.1	309.7	17.96	19.32
	14	350	505	460	22	16	355.6	26	68	16	390	10	430	4.0	7.1	341.4	25.24	26.78
	16	400	565	515	26	16	406.4	26	72	16	440	10	482	4.0	7.1	392.2	30.10	31.97
	18	450	615	565	26	20	457.0	28	72	16	488	12	532	4.0	7.1	442.8	34.50	36.51
	20	500	670	620	26	20	508.0	28	75	16	540	12	585	4.0	7.1	493.8	39.71	42.00
	24	600	780	725	30	20	610.0	28	80	18	640	12	685	5.0	7.1	595.8	48.37	52.11
	28	700	895	840	30	24	711.0	30	80	18	746	12	800	5.0	8.0	695.0	65.27	69.58
	32	800	1015	950	33	24	813.0	32	90	18	848	12	905	5.0	8.0	797.0	86.63	92.34
	36	900	1115	1050	33	28	914.0	34	95	20	948	12	1005	5.0	10.0	894.0	105.90	112.16
	40	1000	1230	1160	36	28	1016.0	34	95	20	1050	12	1110	5.0	10.0	996.0	122.37	129.91
		1200	1455	1380	39	32	1219.0	38	115	25	1256	12	1330	5.0	11.0	1197.0	186.61	195.85
		1400	1675	1590	42	36	1422.0	42	120	25	1480	12	1535	5.0	12.0	1398.0	250.97	262.88
		1600	1915	1820	48	40	1626.0	46	130	25	1666	12	1760	5.0	14.0	1598.0	355.88	370.61
		1800	2115	2020	48	44	1829.0	50	140	30	1866	15	1960	5.0	15.0	1799.0	432.14	448.49
		2000	2325	2230	48	48	2032.0	54	150	30	2070	15	2170	5.0	16.0	2000.0	535.77	553.85

BS4504 111 PN16

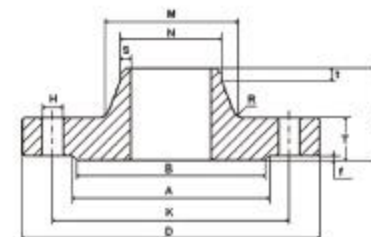


压力	尺寸	通径	外径	中心	孔径	孔数	小头	盘厚	总高	直颈	大头	R	水线	线高	壁厚	内径	RF单重	FF单重
PN	英寸	DN	D	K	H	—	N	T	F	t	M	R	A	f	S	—	KG	KG
BS4504 111 PN16 高颈法兰 (对焊法兰)	10	90	60	14	4	17.2	14	35	6	28	3	40	2.0	1.8	13.6	0.59	0.66	
	15	95	65	14	4	21.3	14	35	6	32	3	45	2.0	2.0	17.3	0.66	0.74	
	20	105	75	14	4	26.9	16	38	6	39	4	58	2.0	2.3	22.3	0.96	1.04	
	25	115	85	14	4	33.7	16	38	6	46	4	68	2.0	2.6	28.5	1.16	1.25	
	32	140	100	18	4	42.4	16	40	6	56	5	78	2.0	2.6	37.2	1.67	1.82	
	40	150	110	18	4	48.3	16	42	7	64	5	88	3.0	2.6	43.1	1.87	2.12	
	50	165	125	18	4	60.3	18	45	8	74	5	102	3.0	2.9	54.5	2.52	2.81	
	65	185	145	18	4	76.1	18	45	10	92	6	122	3.0	2.9	70.3	3.13	3.46	
	80	200	160	18	8	88.9	20	50	10	110	6	138	3.0	3.2	82.5	4.01	4.35	
	100	220	180	18	8	114.3	20	52	12	130	6	158	3.0	3.6	107.1	4.53	4.92	
	125	250	210	18	8	139.7	22	55	12	158	6	188	3.0	4.0	131.7	6.30	6.76	
	150	285	240	22	8	168.3	22	55	12	184	8	212	3.0	4.5	159.3	7.61	8.21	
	200	340	295	22	12	219.1	24	62	16	234	8	268	3.0	5.6	207.9	11.05	11.76	
	250	405	355	26	12	273.0	26	70	16	288	10	320	3.0	6.3	260.4	16.09	17.09	
	300	460	410	26	12	323.9	28	78	16	342	10	378	4.0	7.1	309.7	21.70	23.19	
	350	520	470	26	16	355.6	30	82	16	390	10	438	4.0	8.0	339.6	32.62	34.29	
	400	580	525	30	16	406.4	32	85	16	444	10	490	4.0	8.0	390.4	40.74	42.76	
	450	640	585	30	20	457.0	34	87	16	490	12	550	4.0	8.0	441.0	48.67	51.07	
	500	715	650	33	20	508.0	34	90	16	546	12	610	4.0	8.0	492.0	61.32	64.22	
	600	840	770	36	20	610.0	36	95	18	650	12	725	5.0	8.8	592.4	85.00	89.75	
	700	910	840	36	24	711.0	36	100	18	750	12	795	5.0	8.8	693.4	86.00	91.09	
	800	1025	950	39	24	813.0	38	105	20	848	12	900	5.0	10.0	793.0	109.20	115.50	
	900	1125	1050	39	28	914.0	40	110	20	948	12	1000	5.0	10.0	894.0	126.88	133.76	
	1000	1255	1170	42	28	1016.0	42	120	22	1056	12	1115	5.0	10.0	996.0	168.69	177.40	
	1200	1485	1390	48	32	1219.0	48	130	30	1260	12	1330	5.0	12.5	1194.0	253.88	265.07	
	1400	1685	1590	48	36	1422.0	52	145	30	1465	12	1530	5.0	14.2	1393.6	329.64	342.45	
	1600	1930	1820	56	40	1626.0	58	160	35	1668	12	1750	5.0	16.0	1594.0	470.38	486.94	
	1800	2130	2020	56	44	1829.0	62	170	35	1870	15	1950	5.0	17.5	1794.0	567.93	586.33	
	2000	2345	2230	62	48	2032.0	66	190	40	2072	15	2150	5.0	20.0	1992.0	712.59	733.94	

BS4504 111 PN25




压力	尺寸	通径	外径	中心	孔径	孔数	小头	盘厚	总高	直颈	大头	R	水线	线高	壁厚	内径	RF单重	FF单重
PN	英寸	DN	D	K	H	—	N	T	F	t	M	R	A	f	S	—	KG	KG
BS4504 111 PN25 高颈法兰 (对焊法兰)	3/8	10	90	60	14	4	17.2	16	35	6	28	3	40	2.0	1.8	13.6	0.67	0.74
	1/2	15	95	65	14	4	21.3	16	38	6	32	3	45	2.0	2.0	17.3	0.76	0.84
	3/4	20	105	75	14	4	26.9	18	40	6	40	4	58	2.0	2.3	22.3	1.06	1.17
	1	25	115	85	14	4	33.7	18	40	6	46	4	68	2.0	2.6	28.5	1.30	1.40
	1-1/4	32	140	100	18	4	42.4	18	42	6	56	5	78	2.0	2.6	37.2	1.88	2.03
	1-1/2	40	150	110	18	4	48.3	18	45	7	64	5	88	3.0	2.6	43.1	2.12	2.36
	2	50	165	125	18	4	60.3	20	48	8	74	5	102	3.0	2.9	54.5	2.81	3.10
	2-1/2	65	185	145	18	8	76.1	22	52	10	92	6	122	3.0	2.9	70.3	3.71	4.02
	3	80	200	160	18	8	88.9	24	58	12	110	6	138	3.0	3.2	82.5	4.84	5.18
	4	100	235	190	22	8	114.3	24	65	12	134	6	162	3.0	3.6	107.1	6.44	6.90
	5	125	270	220	26	8	139.7	26	68	12	162	6	188	3.0	4.0	131.7	8.85	9.45
	6	150	300	250	26	8	168.3	28	75	12	190	8	218	3.0	4.5	159.3	11.49	12.18
	8	200	360	310	26	12	219.1	30	80	16	244	8	278	3.0	6.3	206.5	17.16	17.98
	10	250	425	370	30	12	273.0	32	88	18	296	10	335	3.0	7.1	258.8	24.06	25.13
	12	300	485	430	30	16	323.9	34	92	18	350	10	395	4.0	8.0	307.9	31.54	33.14
	14	350	555	490	33	16	355.6	38	100	20	398	10	450	4.0	8.0	339.6	49.11	51.29
	16	400	620	550	36	16	406.4	40	110	20	452	10	505	4.0	8.8	388.8	64.04	66.72
	18	450	670	600	36	20	457.0	42	110	20	500	12	555	4.0	8.8	439.4	71.80	74.64
	20	500	730	660	36	20	508.0	44	125	20	558	12	615	4.0	10.0	488.0	92.77	95.95
	24	600	845	770	39	20	610.0	46	125	20	660	12	720	5.0	11.0	588.0	118.81	123.91
	28	700	960	875	42	24	711.0	46	125	20	760	12	820	5.0	12.5	686.0	143.90	150.29
	32	800	1085	990	48	24	813.0	50	135	22	864	12	930	5.0	14.2	784.6	194.16	202.08
	36	900	1185	1090	48	28	914.0	54	145	24	968	15	1030	5.0	16.0	882.0	238.97	247.57
	40	1000	1320	1210	56	28	1016.0	58	155	24	1070	15	1140	5.0	17.5	981.0	311.87	322.83

BS4504 111 PN40

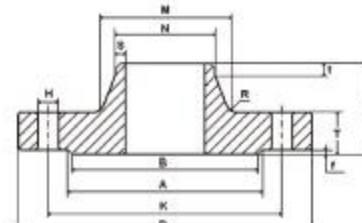


压力	尺寸	通径	外径	中心	孔径	孔数	小头	盘厚	总高	直颈	大头	R	水线	线高	壁厚	内径	RF单重	FF单重
PN	英寸	DN	D	K	H	—	N	T	F	t	M	R	A	f	S	—	KG	KG
BS4504 111 PN40 高颈法兰 (对焊法兰)	3/8	10	90	60	14	4	17.2	16	35	6	28	3	40	2.0	1.8	13.6	0.67	0.74
	1/2	15	95	65	14	4	21.3	16	38	6	32	3	45	2.0	2.0	17.3	0.76	0.84
	3/4	20	105	75	14	4	26.9	18	40	6	40	4	58	2.0	2.3	22.3	1.06	1.17
	1	25	115	85	14	4	33.7	18	40	6	46	4	68	2.0	2.6	28.5	1.30	1.40
	1-1/4	32	140	100	18	4	42.4	18	42	6	56	5	78	2.0	2.6	37.2	1.88	2.03
	1-1/2	40	150	110	18	4	48.3	18	45	7	64	5	88	3.0	2.6	43.1	2.12	2.36
	2	50	165	125	18	4	60.3	20	48	8	74	5	102	3.0	2.9	54.5	2.81	3.10
	2-1/2	65	185	145	18	8	76.1	22	52	10	92	6	122	3.0	2.9	70.3	3.71	4.02
	3	80	200	160	18	8	88.9	24	58	12	110	6	138	3.0	3.2	82.5	4.84	5.18
	4	100	235	190	22	8	114.3	24	65	12	134	6	162	3.0	3.6	107.1	6.44	6.90
	5	125	270	220	26	8	139.7	26	68	12	162	6	188	3.0	4.0	131.7	8.85	9.45
	6	150	300	250	26	8	168.3	28	75	12	190	8	218	3.0	4.5	159.3	11.49	12.18
	8	200	375	320	30	12	219.1	34	88	16	244	8	285	3.0	6.3	206.5	21.05	21.95
	10	250	450	385	33	12	273.0	38	105	18	306	10	345	3.0	7.1	258.8	34.37	35.67
	12	300	515	450	33	16	323.9	42	115	18	362	10	410	4.0	8.0	307.9	47.96	49.92
	14	350	580	510	36	16	355.6	46	125	20	408	10	465	4.0	8.8	338.0	70.08	72.53
	16	400	660	585	39	16	406.4	50	135	20	462	10	535	4.0	11.0	384.4	99.58	102.67
	18	450	685	610	39	20	457.0	50	135	20	500	12	560	4.0	12.5	432.0	96.91	100.00
	20	500	755	670	42	20	508.0	52	140	20	562	12	615	4.0	14.2	479.6	124.43	128.29
	24	600	890	795	48	20	610.0	60	150	20	666	12	735	5.0	16.0	578.0	186.66	193.01

BS4504 112 PN6




压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	C	T	F	M	R	A	f	KG	KG
BS4504 112 PN6 滑套法兰 (带颈平焊)	3/8	10	75	50	11	4	18	12	20	25	3	35	2	0.32	0.37
	1/2	15	90	55	11	4	22	12	20	30	3	40	2	0.37	0.42
	3/4	20	90	65	11	4	27.5	14	24	40	4	50	2	0.56	0.64
	1	25	100	75	11	4	34.5	14	24	50	4	60	2	0.73	0.80
	1-1/4	32	120	90	14	4	43.5	14	26	60	5	70	2	1.03	1.14
	1-1/2	40	130	100	14	4	49.5	14	26	70	5	80	3	1.18	1.36
	2	50	140	110	14	4	61.5	14	28	80	5	90	3	1.33	1.52
	2-1/2	65	160	130	14	4	77.5	14	32	100	6	110	3	1.83	2.07
	3	80	190	150	18	4	90.5	16	34	110	6	128	3	2.72	3.06
	4	100	210	170	18	4	116	16	40	130	6	148	3	3.02	3.41
	5	125	240	200	18	8	141.5	18	44	160	6	178	3	4.35	4.78
	6	150	265	225	18	8	170.5	18	44	185	8	202	3	4.61	5.11
	8	200	320	280	18	8	221.5	20	44	240	8	258	3	6.91	7.53
	10	250	375	335	18	12	276.5	22	44	295	10	312	3	8.89	9.62
	12	300	440	395	22	12	327.5	22	44	355	10	365	4	12.13	13.48

BS4504 112 PN10




压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	C	T	F	M	R	A	f	KG	KG
BS4504 112 PN10 滑套法兰 (带颈平焊)	3/8	10	90	60	14	4	18	14	20	30	3	40	2	0.55	0.63
	1/2	15	95	65	14	4	22	14	20	35	3	45	2	0.62	0.70
	3/4	20	105	75	14	4	27.5	16	24	45	4	58	2	0.91	1.00
	1	25	115	85	14	4	34.5	16	24	52	4	68	2	1.09	1.19
	1-1/4	32	140	100	18	4	43.5	16	26	60	5	78	2	1.57	1.73
	1-1/2	40	150	110	18	4	49.5	16	26	70	5	88	3	1.75	2.00
	2	50	165	125	18	4	61.5	18	28	84	5	102	3	2.37	2.66
	2-1/2	65	185	145	18	4	77.5	18	32	104	6	122	3	3.07	3.41
	3	80	200	160	18	8	90.5	20	34	118	6	138	3	3.76	4.10
	4	100	220	180	18	8	116	20	40	140	6	158	3	4.36	4.75
	5	125	250	210	18	8	141.5	22	44	168	6	188	3	6.07	6.53
	6	150	285	240	22	8	170.5	22	44	195	8	212	3	7.17	7.77
	8	200	340	295	22	8	221.5	24	44	246	8	268	3	9.95	10.69
	10	250	395	350	22	12	276.5	26	46	296	10	320	3	12.47	13.36
	12	300	445	400	22	12	327.5	26	46	350	10	370	4	14.15	15.51
	14	350	505	460	22	16	359.5	26	53	400	10	430	4	22.52	24.06
	16	400	565	515	26	16	411	26	57	456	10	482	4	27.96	29.84
	18	450	615	565	26	20	462	28	63	502	12	532	4	32.44	34.46
	20	500	670	620	26	20	513.5	28	67	559	12	585	4	39.11	41.40
	24	600	780	725	30	20	616.5	28	75	658	12	685	5	47.94	51.67

BS4504 112 PN16

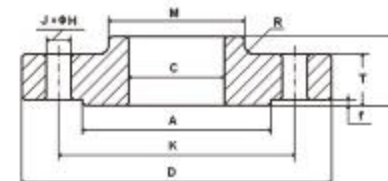


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	C	T	F	M	R	A	f	KG	KG
BS4504 112 PN16 滑套法兰 (带颈平焊)	3/8	10	90	60	14	4	18	14	20	30	3	40	2	0.55	0.63
	1/2	15	95	65	14	4	22	14	20	35	3	45	2	0.62	0.70
	3/4	20	105	75	14	4	27.5	16	24	45	4	58	2	0.91	1.00
	1	25	115	85	14	4	34.5	16	24	52	4	68	2	1.09	1.19
	1-1/4	32	140	100	18	4	43.5	16	26	60	5	78	2	1.57	1.73
	1-1/2	40	150	110	18	4	49.5	16	26	70	5	88	3	1.75	2.00
	2	50	165	125	18	4	61.5	18	28	84	5	102	3	2.37	2.66
	2-1/2	65	185	145	18	4	77.5	18	32	104	6	122	3	3.07	3.41
	3	80	200	160	18	8	90.5	20	34	118	6	138	3	3.76	4.10
	4	100	220	180	18	8	116	20	40	140	6	158	3	4.36	4.75
	5	125	250	210	18	8	141.5	22	44	168	6	188	3	6.07	6.53
	6	150	285	240	22	8	170.5	22	44	195	8	212	3	7.17	7.77
	8	200	340	295	22	12	221.5	24	44	246	8	268	3	9.70	10.41
	10	250	405	355	26	12	276.5	26	46	298	10	320	3	13.28	14.27
	12	300	460	410	26	12	327.5	26	46	350	10	378	4	16.82	18.32
	14	350	520	470	26	16	359.5	30	57	400	10	438	4	27.71	29.38
	16	400	580	525	30	16	411	32	63	456	10	490	4	35.67	37.69
	18	450	640	585	30	20	462	34	68	502	12	550	4	43.26	45.46
	20	500	715	650	33	20	513.5	34	73	559	12	610	4	56.21	59.10
	24	600	840	770	36	20	616.5	36	83	658	12	725	5	77.13	81.89

BS4504 112 PN25

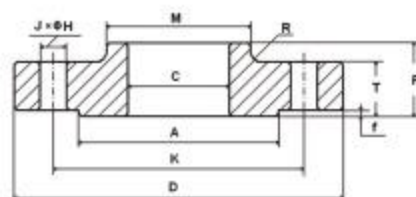


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘厚	总高	台径	R	水线台	水线高	RF单重	FF单重
PN	英寸	DN	D	K	H	—	C	T	F	M	R	A	f	KG	KG
BS4504 112 PN25 滑套法兰 (带颈平焊)	3/8	10	90	60	14	4	18	16	22	30	3	40	2	0.64	0.71
	1/2	15	95	65	14	4	22	16	22	35	3	45	2	0.72	0.79
	3/4	20	105	75	14	4	27.5	18	26	45	4	58	2	1.03	1.12
	1	25	115	85	14	4	34.5	18	28	52	4	68	2	1.25	1.34
	1-1/4	32	140	100	18	4	43.5	18	30	60	5	78	2	1.80	1.95
	1-1/2	40	150	110	18	4	49.5	18	32	70	5	88	3	2.05	2.29
	2	50	165	125	18	4	61.5	20	34	84	5	102	3	2.73	3.02
	2-1/2	65	185	145	18	8	77.5	22	38	104	6	122	3	3.64	3.95
	3	80	200	160	18	8	90.5	24	40	118	6	138	3	4.55	4.89
	4	100	235	190	22	8	116	24	44	145	6	162	3	6.08	6.55
	5	125	270	220	26	8	141.5	26	48	170	6	188	3	8.23	8.82
	6	150	300	250	26	8	170.5	28	52	200	8	218	3	10.52	11.21
	8	200	360	310	26	12	221.5	30	52	256	8	278	3	14.82	15.64
	10	250	425	370	30	12	276.5	32	60	310	10	335	3	20.76	21.83
	12	300	485	430	30	16	327.5	34	67	364	10	395	4	27.36	28.96
	14	350	555	490	33	16	359.5	38	72	418	10	450	4	45.20	47.37
	16	400	620	550	36	16	411	40	78	472	10	505	4	58.01	60.69
	18	450	670	600	36	20	462	42	84	520	12	555	4	66.22	69.06
	20	500	730	660	36	20	513.5	44	90	580	12	615	4	83.51	86.69
	24	600	845	770	39	20	616.5	46	100	684	12	720	5	110.30	115.40

BS4504 112 PN40

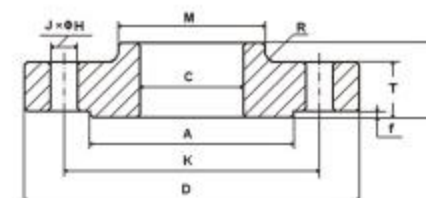


压力	尺寸	通径	外径	中心距	孔径	孔数	内径	盘厚	总高	台径	R	水线台	水线高	RF单重	FF单重
PN	英寸	DN	D	K	H	—	C	T	F	M	R	A	f	KG	KG
BS4504 112 PN40 滑套法兰 (带颈平焊)	3/8	10	90	60	14	4	18	16	22	30	3	40	2	0.64	0.71
	1/2	15	95	65	14	4	22	16	22	35	3	45	2	0.72	0.79
	3/4	20	105	75	14	4	27.5	18	26	45	4	58	2	1.03	1.12
	1	25	115	85	14	4	34.5	18	28	52	4	68	2	1.25	1.34
	1-1/4	32	140	100	18	4	43.5	18	30	60	5	78	2	1.80	1.95
	1-1/2	40	150	110	18	4	49.5	18	32	70	5	88	3	2.05	2.29
	2	50	165	125	18	4	61.5	20	34	84	5	102	3	2.73	3.02
	2-1/2	65	185	145	18	8	77.5	22	38	104	6	122	3	3.64	3.95
	3	80	200	160	18	8	90.5	24	40	118	6	138	3	4.55	4.89
	4	100	235	190	22	8	116	24	44	145	6	162	3	6.08	6.55
	5	125	270	220	26	8	141.5	26	48	170	6	188	3	8.23	8.82
	6	150	300	250	26	8	170.5	28	52	200	8	218	3	10.52	11.21
	8	200	375	320	30	12	221.5	34	52	260	8	285	3	18.10	19.00
	10	250	450	385	33	12	276.5	38	60	312	10	345	3	28.02	29.33
	12	300	515	450	33	16	327.5	42	67	380	10	410	4	40.18	42.15
	14	350	580	510	36	16	359.5	46	72	424	10	465	4	58.56	61.02
	16	400	660	585	39	16	411	50	78	478	10	535	4	61.97	65.05
	18	450	685	610	39	20	462	50	84	522	12	560	4	78.82	81.91
	20	500	755	670	42	20	513.5	52	90	576	12	615	4	99.07	102.93
	24	600	890	795	48	20	616.5	60	100	686	12	735	5	151.47	157.82

BS4504 113 PN6

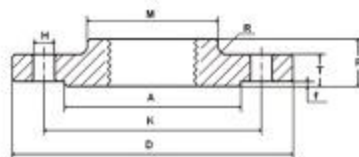


压力	尺寸	通径	外径	中心距	孔径	孔数	螺纹内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	BSP	T	F	M	R	A	I	KG	KG
BS4504 113 PN6 螺纹法兰	1/2	15	80	55	11	4	17	12	20	30	3	40	2	0.39	0.45
	3/4	20	90	65	11	4	22.5	14	24	40	4	50	2	0.62	0.68
	1	25	100	75	11	4	29	14	24	50	4	60	2	0.78	0.85
	1-1/4	32	120	90	14	4	37.5	14	26	60	5	70	2	1.11	1.22
	1-1/2	40	130	100	14	4	43.5	14	26	70	5	80	3	1.27	1.45
	2	50	140	110	14	4	55	14	28	80	5	90	3	1.46	1.66
	2-1/2	65	160	130	14	4	71	14	32	100	6	110	3	2.02	2.26
	3	80	190	150	18	4	83.5	16	34	110	6	128	3	2.98	3.32
	4	100	210	170	18	4	108.5	16	40	130	6	148	3	3.44	3.82
	5	125	240	200	18	8	134	18	44	160	6	178	3	4.91	5.34
	6	150	265	225	18	8	159.5	18	44	185	8	202	3	5.60	6.10

BS4504 113 PN10

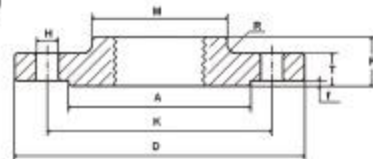


压力	尺寸	通径	外径	中心距	孔径	孔数	螺纹内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	BSP	T	F	M	R	A	I	KG	KG
BS4504 113 PN10 螺纹法兰	1/2	15	95	65	14	4	17	14	20	35	3	45	2	0.64	0.72
	3/4	20	105	75	14	4	22.5	16	24	45	4	58	2	0.95	1.04
	1	25	115	85	14	4	29	16	24	52	4	68	2	1.14	1.24
	1-1/4	32	140	100	18	4	37.5	16	26	60	5	78	2	1.65	1.80
	1-1/2	40	150	110	18	4	43.5	16	26	70	5	88	3	1.84	2.09
	2	50	165	125	18	4	55	18	28	84	5	102	3	2.51	2.79
	2-1/2	65	185	145	18	4	71	18	32	104	6	122	3	3.26	3.60
	3	80	200	160	18	8	83.5	20	34	118	6	138	3	4.02	4.36
	4	100	220	180	18	8	108.5	20	40	140	6	158	3	4.78	5.17
	5	125	250	210	18	8	134	22	44	168	6	188	3	6.63	7.09
	6	150	285	240	22	8	159.5	22	44	195	8	212	3	8.16	8.75

BS4504 113 PN16

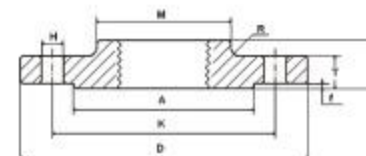


压力	尺寸	通径	外径	中心距	孔径	孔数	螺纹内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	BSP	T	F	M	R	A	I	KG	KG
BS4504 113 PN16 螺纹法兰	1/2	15	95	65	14	4	17	14	20	35	3	45	2	0.64	0.72
	3/4	20	105	75	14	4	22.5	16	24	45	4	58	2	0.95	1.04
	1	25	115	85	14	4	29	16	24	52	4	68	2	1.14	1.24
	1-1/4	32	140	100	18	4	37.5	16	26	60	5	78	2	1.65	1.80
	1-1/2	40	150	110	18	4	43.5	16	26	70	5	88	3	1.84	2.09
	2	50	165	125	18	4	55	18	28	84	5	102	3	2.51	2.79
	2-1/2	65	185	145	18	4	71	18	32	104	6	122	3	3.26	3.60
	3	80	200	160	18	8	83.5	20	34	118	6	138	3	4.02	4.36
	4	100	220	180	18	8	108.5	20	40	140	6	158	3	4.78	5.17
	5	125	250	210	18	8	134	22	44	168	6	188	3	6.63	7.09
	6	150	285	240	22	8	159.5	22	44	195	8	212	3	8.16	8.75

BS4504 113 PN25



压力	尺寸	通径	外径	中心距	孔径	孔数	螺纹内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF 单重
PN	英寸	DN	D	K	H	—	BSP	T	F	M	R	A	I	KG	KG
BS4504 113 PN25 螺纹法兰	1/2	15	95	65	14	4	17	16	22	35	3	45	2	0.74	0.82
	3/4	20	105	75	14	4	22.5	18	26	45	4	58	2	1.07	1.16
	1	25	115	85	14	4	29	18	28	52	4	68	2	1.31	1.40
	1-1/4	32	140	100	18	4	37.5	18	30	60	5	78	2	1.89	2.04
	1-1/2	40	150	110	18	4	43.5	18	32	70	5	88	3	2.16	2.40
	2	50	165	125	18	4	55	20	34	84	5	102	3	2.89	3.17
	2-1/2	65	185	145	18	8	71	22	38	104	6	122	3	3.87	4.18
	3	80	200	160	18	8	83.5	24	40	118	6	138	3	4.85	5.19
	4	100	235	190	22	8	108.5	24	44	145	6	162	3	6.54	7.00
	5	125	270	220	26	8	134	26	48	170	6	188	3	8.84	9.43
	6	150	300	250	26	8	159.5	26	52	200	8	218	3	11.69	12.38

BS4504 113 PN40

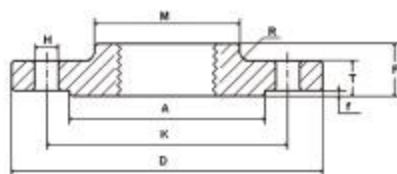

压力	尺寸	通径	外径	中心距	孔径	孔数	螺纹内径	盘厚	总高	台径	R	水线台	水线高	RF 单重	FF单重
PN	英寸	DN	D	K	H	—	BSP	T	F	M	R	A	f	KG	KG
BS4504 113 PN40 螺纹法兰	1/2	15	95	65	14	4	17	16	22	35	3	45	2	0.74	0.82
	3/4	20	105	75	14	4	22.5	18	26	45	4	58	2	1.07	1.16
	1	25	115	85	14	4	29	18	28	52	4	68	2	1.31	1.40
	1-1/4	32	140	100	18	4	37.5	18	30	60	5	78	2	1.89	2.04
	1-1/2	40	150	110	18	4	43.5	18	32	70	5	88	3	2.16	2.40
	2	50	165	125	18	4	55	20	34	84	5	102	3	2.89	3.17
	2-1/2	65	185	145	18	8	71	22	38	104	6	122	3	3.87	4.18
	3	80	200	160	18	8	83.5	24	40	118	6	138	3	4.85	5.19
	4	100	235	190	22	8	108.5	24	44	145	6	162	3	6.54	7.00
	5	125	270	220	26	8	134	26	48	170	6	188	3	8.84	9.43
	6	150	300	250	26	8	159.5	28	52	200	8	218	3	11.89	12.38

FITTING

