

SABS/BS FLANGE




SABS 1123-1600/3




Nominal Pipe Size	Outside Diam	Pipe	BORE	Thickness	Bolt circle diam	Raise Face		Diam of Bolt	Number of holes	Weight / kg	
						g	f			Slip on	Blind
1600/3	D	OD	do	t	C			H	N		
15MM	95	21.3	22	10	65	45	2	14	4	0.48	0.51
20MM	105	26.9	27.6	10	75	58	2	14	4	0.58	0.63
25MM	115	33.7	34.4	10	85	68	2	14	4	0.69	0.77
32MM	140	42.4	43.1	10	100	78	2	18	4	1.01	1.13
40MM	150	48.3	49	10	110	88	3	18	4	1.16	1.31
50MM	165	60.3	61.1	12	125	102	3	18	4	1.64	1.92
65MM	185	76.1	77.1	12	145	122	3	18	4	1.99	2.44
80MM	200	88.9	90.3	14	160	138	3	18	8	2.52	3.23
100MM	220	114.3	115.9	14	180	158	3	18	8	2.8	3.96
125MM	250	139.7	141.6	16	210	188	3	18	8	3.96	5.91
150MM	285	168.3	170.5	18	240	212	3	22	8	5.47	8.59
200MM	340	219.1	221.8	22	295	268	3	22	12	8.29	14.9
250MM	405	273	276.2	25	355	320	3	26	12	12.4	24.05
300MM	460	323.9	327.6	28	410	378	4	26	12	16.82	35.15
350MM	520	355.6	359.7	30	470	438	4	26	16	24.37	48.05
400MM	580	406.4	411	35	525	490	4	26	16	34.42	70.31
450MM	640	457	462.5	40	585	550	4	26	20	45.83	97.75
500MM	715	508	513.6	40	650	610	4	33	20	56.69	120.8
600MM	840	610	616.5	50	770	725	5	33	20	95.19	210.96

SABS 1123-1600/4

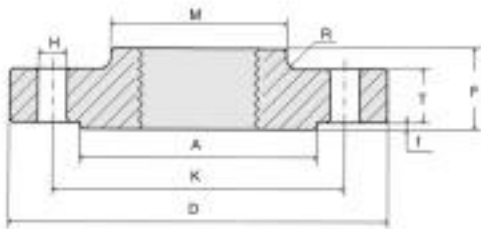

压力	通径	外径	中心距	孔径	孔数	内径	壁厚	总高	突台径	R	台径	台高	RF 单重	FF 单重
PN	DN	D	K	H	—	BSP	T	F	M	R	A	f	KG	KG
Nominal pressure 1600/4kPa	10	90	60	14	4	15.00	8	14	30	4	40	2	0.38	0.45
	15	95	65	14	4	17.00	8	14	35	4	45	2	0.44	0.51
	20	105	75	14	4	22.50	8	16	45	4	58	2	0.57	0.66
	25	115	85	14	4	29.00	8	16	52	4	68	2	0.69	0.78
	32	140	100	18	4	37.50	10	20	60	6	78	2	1.21	1.36
	40	150	110	18	4	43.50	10	20	70	6	88	3	1.43	1.68
	50	165	125	18	4	55.00	12	22	85	6	102	3	2.01	2.30
	65	185	145	18	4	71.00	12	26	105	6	122	3	2.65	2.99
	80	200	160	18	8	83.50	14	28	118	8	138	3	3.32	3.66
	100	220	180	18	8	108.50	14	34	140	8	158	3	4.01	4.39
	*125	250	210	18	8	134.00	16	38	168	8	188	3	5.67	6.12
	150	285	240	22	8	159.50	18	40	195	10	212	3	7.60	8.20

BS 10 TABLE D SCREWED

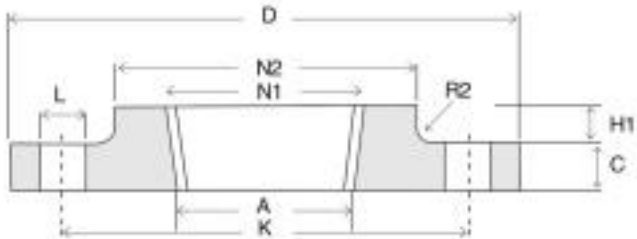

N.B Size		外径	中心距	孔径	内径	板厚	大内径	颈外径	颈高		孔数	单重
		D	K	L	A	C	N1	N2	H1	R2	No. Holes	Unit Weight
Ins	mm	mm	mm	mm	mm	mm	mm	mm	mm			KG
1/2 "	15	95.3	66.8	14.5	18.7	4.8	19.7	33.3	9.5	1.6	4	0.28
3/4 "	20	101.6	73.2	14.5	24.3	4.8	25.3	38.1	11.1	1.6	4	0.32
1 "	25	114.3	82.6	14.5	30.5	4.8	31.7	47.6	11.1	1.6	4	0.43
1 1/4 "	32	120.7	87.4	14.5	39	6.4	40.4	55.6	11.1	1.6	4	0.59
1 1/2 "	40	133.4	98.6	14.5	44.9	6.4	46.3	61.9	12.7	1.6	4	0.73
2 "	50	152.4	114.3	17.5	56.7	7.9	58	74.6	12.7	1.6	4	1.1
2 1/2 "	65	165.1	127	17.5	72.2	7.9	73.7	90.5	15.9	1.6	4	1.31
3 "	80	184.2	146.1	17.5	85	9.7	86.5	106.4	15.9	1.6	4	1.93
4 "	100	215.9	177.8	17.5	110.1	9.7	111.6	133.4	19.1	3.2	4	2.66
5 "	125	254	209.6	17.5	137	12.7	138.5	160.3	19.1	3.2	8	4.21
6 "	150	279.4	235	17.5	164.5	12.7	166	185.7	19.1	3.2	8	4.68
8 "	200	336.6	292.1	17.5	215.5	12.7	217	241.3	22.2	3.2	8	6.66
10 "	250	406.4	355.6	22.2	269.5	16	271	298.5	27	3.2	8	11.49
12 "	300	457.2	406.4	22.2	321	19.1	322.5	349.3	28.6	4.8	12	15.14